

 Russound.



2010

International
Catalog

Table of Contents

Product Showcase	3
------------------	---

Multiroom Audio Systems

Collage™ System	4
C-Series System	5
CAV6.6 & CAM6.6 Systems	6-9
CAA Systems	10-11
CAS Systems	12-13
CA4 Systems	14
A-BUS® Systems	15-18

Source Equipment

Smart Media Servers	19
Smart Dual Tuners	20
iBridge Systems	20
Video Distribution	21

Loudspeakers and Amplifiers

Acclaim® Speakers	22-27
Ratio® High-Efficiency Speakers	28-29
Flexbox Back Boxes	29
Rock Speakers	30
R-Series Amplifiers	31

Impedance Matching

Volume Controls	32-33
Speaker Selectors	34

Intercom Systems

ComPoint® Intercom system	35-36
---------------------------	-------

IR Systems

SaphIR® systems	37-39
-----------------	-------

Accessories

PlateMate	40-44
System Accessories	45

Warranty	46
----------	----



Hello from Russound

Making good on a promise I made last year to be focused on delivering products designed to grow our customers' business, I am pleased to announce that we have successfully begun shipping our Collage™ Powerline Media and Intercom system. The Collage system offers installer and user friendly features that open up the retrofit installation market for our industry. This is important to us, as the consumer trend is shifting towards adding features to existing homes over new construction and remodeling.

In tandem with our Collage Powerline Media and Intercom system launch, we have been working hard to deliver additional products that make retrofit installations easier. Our Acclaim 7 Series Fixed Tilt speaker models offer flexible platforms that allow for focused sound output in rooms that would have been "hard-to-fit" with traditional architectural speakers. The new Acclaim 5 Series OutBack speakers offer higher performance and more mounting options than our previous outdoor speaker offerings. We are also quite proud of our forthcoming MCA-C3 Multiroom Controller Amplifier. Based on our incredibly successful MCA-C5, the C3 is poised to deliver similar features in a 6-source, 6-zone configuration.

Set aside some time to explore our product guide. You'll notice a balance of products from complete multiroom systems to speakers, sources and accessories. We have done our best to supplement our existing products with new offerings that help improve any multiroom experience. If you have any questions about our products or systems, please feel free to give us a call. We're here to help.

Sincerely,

Charlie Porritt
CEO

Visit our Reseller Portal at:
<http://www.russound.com/portal>

Place and track orders, access transaction history, and view up-to-date business and technical information 24/7.

More Acclaim



Acclaim 7 Series, Fixed Tilt speakers for Collage systems

Engineered to work specifically with Collage Amplified Keypads in retrofit installations, the new Acclaim 7 Series Fixed Tilt wide-dispersion in-wall speaker is designed to fit into a single stud bay. Features magnetic grilles come in Single-Point Stereo and Stereo pair.

For more information on Acclaim speakers, please visit: www.russound.com, or see pages 22–27



The Acclaim 5 Series OutBack loudspeakers

Designed to deliver rich, full sound in extreme environments, such as a backyard, patio, deck, or other areas subjected to temperature shifts and high-moisture exposure. Their high-efficiency design and multiple mounting options allow these speakers to be easily installed on a wall, eave, pole, corner or as a freestanding stereo pair.

The line of Acclaim 5 Series OutBack speakers includes the 5B45 4", the 5B55 5", and 5B65 6" stereo pairs, and the 5B65S Single Point Stereo models. Each model is available in both black and white finishes



With a lineup of four models, the Acclaim 5 Series OutBack speakers are equipped with features that ensure durability in any outdoor conditions. Sealed enclosures, salt-tested marine grade hardware, and aluminum grilles make the Acclaim 5 Series OutBack speakers weather resistant. Drivers with polypropylene cones, rubber surrounds and 1" Teteron dome tweeters deliver full range audio through a wide range of temperatures.

For more information on Acclaim Speakers, please visit: www.russound.com, or see pages 22–27



3

Coming Soon Russound C-Series

Russound's digitally amplified C-Series Multizone Audio system. The MCA-C3 delivers six audio sources including a built in RDS enabled AM/FM tuner to six rooms. The keypad's multiline display provides informative source control and advanced features such as source and zone linking, party mode, and sleep timers and alarms.

For more information on C-Series components, please visit: www.russound.com, or see page 5.



Collage™ Powerline Media and Intercom System

Collage powerline media and intercom system



Innovative. Intuitive. Affordable.

Retrofit is now Retroquick

The Russound Collage power line media and intercom system uses existing electrical wiring to stream music throughout a home. Zones can be installed anywhere near electrical fixtures are located, making retrofit installations a breeze and unobtrusive.

More Choices. No Limits.

Access network attached music, online music services, and communicate between keypads. In addition to a built-in FM tuner, a free 6 month subscription to Rhapsody™ online music service gives you 8 million songs and three independent streams of music.



* Rhapsody music services is available in the US only.

Collage System Components

Collage Amplified Keypad

Features a high-resolution VGA display for viewing system and source information, or feeds from CCTV cameras. The capacitive touch buttons and scroll wheel provide easy, intuitive navigation of sources and networked stored music. A built-in microphone allows for zone-to-zone intercom communication and room monitoring. Internal FM tuner. 16 Watts per channel @ 8 Ohms, 4 Ohm load.

2920-531309: CAK1 White
2920-531316: CAK1 Black



Collage Keypad Conversion Kit

2920-531699: CAK1 Almond
2920-531682: CAK1 White
2920-531705: CAK1 Black



Collage Remote Control

12 button remote that provides access to Collage system keypad presets and functions, including alarm and sleep timer.

2920-531354: CRC1



Collage Media Manager

Provides the network to host up to 10 Collage Amplified Keypads. It can broadcast up to 3 independent stream of digital music from a local area network or the internet.

2920-531323: CMM1



Collage System Peripherals

Engineered using Gridcast™ technology, the Collage Dock and Source Bridge and their source equipment can be located anywhere in a home where electrical wiring is run.



Coming Soon

Collage Dock

The Collage Dock allows the integration of an iPod as an audio source within a Collage Powerline Media and Intercom system. The Dock supplies information about the song, artist, album, genre and playlist to the Collage Amplified Keypad screen while keeping the iPod charged and ready to go.


2920-531330: CPD1

Coming Soon

Collage Source Bridge

The Collage Source Bridge provides an access point for connecting legacy audio and video products to a Collage Powerline Media and Intercom system. Featuring stereo RCA and S/PDIF digital audio inputs, a composite video input, as well as an IR emitter port, the Source Bridge allows for connection and control of CD changers or CCTV video cameras.

2920-531347: CSB1



C-Series Multiroom Controller Amplifier System



C-Series MCA-C5 System

Includes

- (1) MCA-C5 controller
- (6) MDK-C5 system keypads
- (1) SRC-C5 Remote control
- (1) AM Antenna
- (1) FM Antenna
- (1) Pair rack ears
- (6) 845.1 IR Emitters


White & Almond Wall plates and rack ears included

RNET

1550-531125: KT1-C5
1550-531149: KT1-C5 EU
1550-531132: KT1-C5 UK
 Shipping Weight
 38.35 lbs. (17.4 kg)

FEARCE

C-Series Multiroom Controller Amplifier System

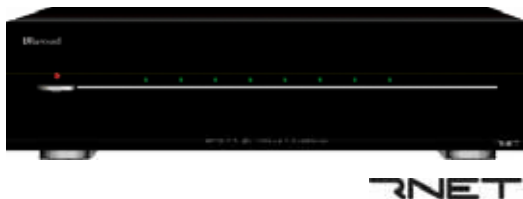

C-Series Multizone Controller Amplifier, MCA-C5

The MCA-C5 is a (8) Zone/(8) Source Controller Amplifier. 8 zones of audio with adjustable bass/treble/loudness/balance with digital amplifiers providing 40 watts of power per channel to zones one through six, 8 source inputs with loop outputs and fixed or variable line outputs per zone, routed IR, built-in IR learning and a pre-programmed IR library, paging and doorbell muting. Internal FM Tuner. Source linking and zone linking. Front USB and rear RS-232 serial ports, rear Ethernet port, color-coded detachable 14-gauge snap connectors, 12 Volt & home theater triggers. AM and FM Antennas Included. Controllers are rack-mount 2-unit high, and include rack ears.

Rack ears included

17"W x 3.5"H x 17.2"D (43.2 x 9 x 43.6 cm)

1550-530913: MCA-C5

1550-531118: MCA-C5 EU

1550-531101: MCA-C5 UK

Shipping Weight 34.55 lbs. (15.68 kg)

FEARCE



C-Series Multiline Display Keypad

Wall-mounted, standard fit, double-gang keypad for the MCA-C5 Multizone Controller Amplifier. 3" diagonal, high-resolution gray scale LCD screen displays real-time system information. Responsive hard buttons provide easy navigation of sources and content. Adjustable brightness, volume, bass, treble, and balance. Access to source selection and control, party mode, all off, and alarm and sleep timer. RJ45 connection. 4.5"W x 4.5"H (11.43 x 11.43 cm)

1550-530937: MDK-C5 (white/almond)

Shipping Weight 1 lb. (454 g)

FEARCE



C-Series Plasma Friendly Multi-line Display Keypad

Designed for Home Theater applications which use Plasma screens
 4.5"W x 4.5"H (11.43 x 11.43 cm)

1550-531729: MDK-C5P (white/almond)

Shipping Weight 1 lb. (454 g)

FEARCE



Keypad Desktop Stand

Desktop Stand is an accessory base that allows the E-Series KLK-E5, KLK-E6 and C-Series MDK-C5 keypads to be used on a desk, table, or counter top. Weighted body and non-skid base. 5.92" W x 5.38" D x 4.68" H (152 x 138 x 120 mm)

7301-532351: DTS1 White

7301-532368: DTS1 Black

Shipping Weight: 1.93 lbs (0.87 kg)



C-Series System Remote

Preprogrammed with IR learning capabilities. Control up to 11 (8 system and 3 local) devices. Backlit keys include sleep button and 2 programmable favorites for fast access or frequently used sources.

1550-530906: SRC-C5

Shipping Weight 7.4 oz. (210 g)

Color Conversion Kit

Includes (1) Decora Trim and (1) Keypad Bezel.

1550-531361: White

1550-531378: Almond

1550-531385: Bone

1550-531392: Brown

1550-531408: Black

Shipping Weight 4 oz. (114 g)

CAV6.6 & CAM6.6 Systems

Russound CAV6.6 and CAM6.6 Controller Amplifier Common Features

6 sources distributed to 6 zones with adjustable bass/treble/loudness/balance (40 Watts per zone), CAV has 5 fixed outs, CAM has 2 variable outs, routed IR, built-in IR Learning and a pre-programmed IR library, doorbell muting, power management and macro source control. Rear RS-232 serial ports, color-coded detachable 14-gauge snap connectors, six IR emitters, 12 Volt & home theater triggers. Controllers are rack-mount 2-unit high, and include rack ears..



CAV6.6 with (6) UNO-S2 Keypads

(6) UNO-S2 Keypads, (1) Remote,
(6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included

1500-528200: CAV6.6-S2

1500-120411: CAV6.6-S2 EU

1500-120435: CAV6.6-S2 UK

Shipping Weight 33 lbs (15 kg)



CAV6.6 6 Zone/6 Source Controller Amplifier with Video

The CAV6.6 includes all the common features of the CAV6.6 and CAM6.6 family of controllers, but adds composite video inputs for all 6 sources, source loop outputs, front panel A/V auxiliary and RS-232 inputs, paging, and 4 A-BUS® ready sub-zones.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1500-119668: CAV6.6



1500-120398: CAV6.6-EU

1500-120404: CAV6.6-UK

Shipping Weight 27 lbs (12.2 kg)

6

CAM6.6 Systems with Satellite Tuner



XM Satellite radio service is available in the UNITED STATES & CANADA ONLY



CAM6.6 with XM Tuner, (1) UNO-S2 and (5) UNO-S1 Keypads

CAM6.6X Controller with (1) System Remote, (1) UNO-S2 Keypad, (5) UNO-S1 Keypads, (6) 845.1 and (1) Punchdown Tool. RG6 to SMB adapter cable.

White & Almond Wall plates and rack ears included

1600-528309: CAM6.6X-S1/S2

Shipping Weight 32 lbs (14.5 kg)



CAM6.6 with XM Tuner and (6) UNO-S2 Keypads

CAM6.6X Controller with (6) UNO-S2 Keypad, (1) System Remote, (6) 845.1 and (1) Punchdown Tool. RG6 to SMB adapter cable.

White & Almond Wall plates and rack ears included

1600-528422: CAM6.6X-S2

Shipping Weight 32 lbs (14.5 kg)



CAM6.6X 6 Zone/6 Source Controller Amplifier with XM Tuner

The CAM6.6X includes all the common features of the CAV6.6 and CAM6.6 family of controllers, with the addition of an internal XM satellite radio tuner. A XM antenna with 20' lead and RG6 to SMB adapter cable are included.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1600-521638: CAM6.6X



Shipping Weight 27 lbs (12.2 kg)



CAM 6.6 Systems with AM/FM Tuner



CAM6.6, AM/FM Tuner and (6) UNO-S2 Keypads

CAM6.6T Controller with (6) UNO-S2 Keypads,
(1) System Remote, (6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included


1600-528316: CAM6.6T-S2 **FEHCE**

1600-524325: CAM6.6T-S2 EU

1600-524349: CAM6.6T-S2 UK

Shipping Weight 32 lbs (14.5kg)

RNET

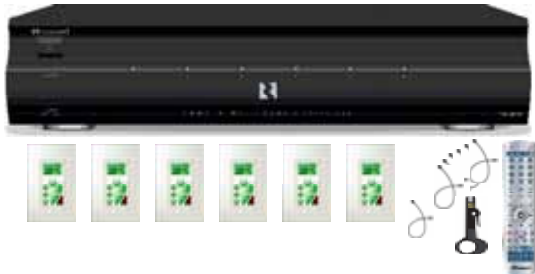

CAM6.6, AM/FM Tuner and (6) UNO-S1 Keypads

CAM6.6T Controller with (6) UNO-S1 Keypads,
(1) System Remote, (6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included

1600-528293: CAM6.6T-S1 **FEHCE**

1600-521577: CAM6.6T-S1 EU

1600-521553: CAM6.6T-S1 UK

Shipping Weight 32 lbs (14.5kg)

RNET



CAM6.6T 6 Zone/6 Source Controller Amplifier with AM/FM Tuner

The CAM6.6T includes all the common features of the CAV6.6 and CAM6.6 family of controllers, with the addition of an internal AM/FM radio tuner. AM and FM antennas are included.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1600-521256 : CAM6.6T **FEHCE**

1600-521621: CAM6.6T-EU

1600-521614: CAM6.6T-UK

Shipping Weight 27 lbs (12.2kg)

RNET

CAM 6.6 Systems without Tuner



CAM6.6 (w/out Tuner) with (6) UNO-S2 Keypads

(1) CAM6.6, (6) UNO-S2 Keypads, (1) Remote, (6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included


1600-528330: CAM6.6-S2 US **FEHCE**

1600-524387: CAM6.6-S2 EU

1600-524400: CAM6.6-S2 UK

Shipping Weight 30 lbs (13.6 kg)

RNET

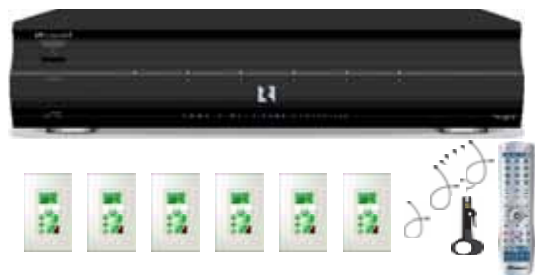

CAM6.6 (w/out Tuner) with (6) UNO-S1 Keypads

(1) CAM6.6, (6) UNO-S1 Keypads, (1) Remote, (6) 845.1 and (1) Punchdown Tool.

White & Almond Wall plates and rack ears included

1600-528323: CAM6.6-S1 US **FEHCE**

1600-521812: CAM6.6-S1 EU

1600-521799: CAM6.6-S1 UK

Shipping Weight 32 lbs (14.4 kg)

RNET



CAM6.6 6 Zone/6 Source Controller Amplifier without Tuner

The CAM6.6 includes all the common features of the CAV6.6 and CAM6.6 family of controllers.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

Rack ears included

1600-521836: CAM6.6 US **FEHCE**

1600-521850: CAM6.6-EU

1600-521843: CAM6.6-UK

Shipping Weight 27 lbs (12.2 kg)

RNET

CAV6.6 & CAM6.6 Systems




UNO-S1, Single Gang Keypad

Scrolling 5 character LCD and back lit buttons selectable color (green or amber), custom source names, IR pass-through, 110 Punch-down connector, system status feedback: volume, bass, treble, balance, shared source, party mode, Do Not Disturb, All On, All Off. White & Almond wall plates included 1.3125" W x 1.125" D x 2.5" H (3.3 x 3.2 x 6.35 cm)

2500-528262: White & Almond UNO-S1

Shipping Weight 6 oz (.1 kg)



UNO-S1

Conversion kit

- (1) Mounting plate,
- (1) Insert Plate,
- (1) Cover plate.

2500-528170: White

2500-528187: Almond

2500-528088: Bone

2500-528095: Black

2500-528101: Brown

Shipping Weight 2 oz (.1 kg)



UNO-S2, Double Gang Keypad

Features: Scrolling 12 character LCD and backlit buttons with selectable color (green or amber), custom source names, IR pass-through, 110 Punch-down connector, system status feedback: volume, bass, treble, balance, shared source, party mode, Do Not Disturb, All On, All Off. White & Almond wall plates included 3.65" W x 1.125" D x 4.3" H (9.2 x 10.9 x 2.8 cm)

2500-528255: White & Almond UNO-S2

Shipping Weight 2 lbs (.9 kg)



UNO-S2/K2

Conversion kit

- (1) Mounting plate,
- (1) Insert Plate,
- (1) Cover plate.

2500-528156: White

2500-528163: Almond

2500-528118: Bone

2500-528125: Black


2500-528132: Brown

Shipping Weight 2 oz (.1 kg)



Two gang + single gang Cover Plate SWP-S21

See pg. 42 for order info.



Brushed Aluminum Cover plate

Shipping Weight 2oz (.071kg)
See pg. 42 for order info.

8



UNO-TS2 Touchscreen, In-Wall

Real-time display shows what's playing, with volume level and individualized playlist information right on the touchscreen. High-resolution color LCD 3.75" diagonal touchscreen is easy to read and simple to navigate. Flush design fits neatly in a double-gang box. ***After the first UNO-TS2, each additional UNO-TS2 my require an**

SA-ZX3 keypad splitter. Check Controller specifications.

2500-521171: White UNO-TS2

2500-521973: Almond UNO-TS2

2500-521980: Bone UNO-TS2

2500-521997: Black UNO-TS2

2500-522000: Brown UNO-TS2

Shipping Weight 1.2 lbs.



UNO-TS2D Desktop Touchscreen

Desktop version of the UNO-TS2 wall-mounted touchscreen. 5.92"W x 5.38"D x 4.68"H (15.2 x 13.8 x 12.0 cm)

2500-526718: White UNO-TS2D

2500-526725: Black UNO-TS2D

Shipping Weight 4 lbs.(1.8 kg)

RNET Touchpoint

Allows iPhone and iPod touch to control Russound RNET multizone controller amplifiers. Works with the Russound CAV6.6, CAM6.6, MCA-C5, and ACA-E5 controller amplifiers. A local wireless network and iPhone® or iPod touch are required for wireless control.

2610-531903: TCH1

Shipping Weight 2.1 lbs.



Touchpoint Station

Accessories



RNET AV kit

Allows addition of a remote source component to a Russound RNET enabled Controller Amplifier. Encoder and Decoder convey stereo audio, video, and control signals up to 300 feet (90 m) over a single CAT-5e cable. Includes: (1) RAVE1, (1) RAVD1 and (1) power supply.

9590-529399: RAVK1

9590-520265: RAVK1 EU

9590-520272: RAVK1 UK

Ship Weight 5.6 oz (158 g)



UNO Keypad Splitter

Increases power output for connecting up to 3 system keypads to one keypad output on a Russound RNET® Controller Amplifier. Includes (1) RJ-45 input jack, (3) RJ-45 keypad jacks, (1) 1201A 120V power supply.

2500-120497: SA-ZX3 includes Power Supply

2500-120176: SA-ZX3 without Power Supply

Shipping Weight 4 oz. (.11 kg)



System Remote Control

Advanced learning remote control for Russound multiroom systems. Controls up to eight audio-video sources and three local.

1210-524196: SRC2

Ship Weight 1 lb (.45 kg)



PC Power Tool Custom Software

Software for fast, accurate configuration of ST2, CAV6.6 and CAM6.6 systems.

Includes: carrying case, software CD, quick start guide, punchdown tool, controller and keypad cables.

1999-520105

Shipping Weight 1 lb (.45 kg)



Programming Cable

Basic programming cable for UNO keypads and touchscreens and SaphIR K2 keypads. Female DB-9 connection (PC end) and flat keypad pin connection (keypad end). 72" L (182.9 cm)

2500-121036

Shipping Weight 1 lbs.(0.45 kg)



Advanced Programming Cable

For UNO-S1, KP4, KP6, KPL keypads, ComPoint components and iBridge Dock. Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065

Shipping Weight 1 lbs.(0.45 kg)



CAA66 controller with (6) LCD keypads

(6) 845.1 single emitters, punchdown tool, (1) system remote control. (1) CAA66 Controller. (6) Decora® style KPL single-gang keypad has amber backlit LCD panel, source selection, system status indication plus IR pass-through and confirmation. EU and UK kits include wallplates.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-528347: CAA66L

1210-525582: CAA66L EU

1210-525605: CAA66L UK

Shipping Weight 29 lbs. (13.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



CAA66 controller with (6) KP6 system keypads

(6) 845.1 single emitters, punchdown tool, (1) system remote control. Features: (1) CAA66 Controller. (6) Decora® style KP6 single-gang keypad has amber backlit buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-528354: CAA66K

1210-525674: CAA66K EU

1210-525681: CAA66K UK

Shipping Weight 29 lbs. (13.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



Controller Amplifier: Advanced 6 source/6 zone

CAA66 Features: (6) Six zones (40 Watts per zone) Front panel programing center, built-in IR learning, rear RS-232 serial port, extensive built-in IR library, controller link in and out, color-coded detachable 14-gauge snap connectors, rack-mount 2-unit high. (6) IR Emitters, Controller Only, No keypads. Rack ears included. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-524882: CAA66 US

1210-525827: CAA66 EU

1210-525834: CAA66 UK

Shipping Weight 23 lbs. (10.4 kg)



LCD Keypad for CAA66/CAS44 Systems

In-wall Decora® style single-gang keypad features backlit LCD panel, amber backlit soft-touch buttons, assignable source names, IR pass-through, 110 punchdown connector, system status feedback, user adjustable zone bass, treble, loudness and balance.

1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm) **Wall plates not included.**

1210-528385: White & Almond KPL

Shipping Weight 4.5 oz. (127.6 g)



Color Conversion Kit for KPL

Includes (6) Decora® inserts.

1210-525100: White

1210-525117: Almond

1210-525124: Bone

1210-525131: Black

1210-525148: Brown

Shipping Weight 2oz (.1kg)



System Keypad for CAA66 System

In-wall Decora® style single-gang keypad features amber backlit soft-touch buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 110 punchdown connector, installer adjustable zone bass, treble, loudness and balance.

1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm) **Wall plates not included.**

1210-528392: White & Almond KP6

Shipping Weight 4.0 oz. (113 g)



Color Conversion Kit for KP6

Includes (6) Decora® inserts.

1210-525209: White

1210-525216: Almond

1210-525223: Bone

1210-525230: Black

1210-525247: Brown

Shipping Weight 2oz (.1kg)



Source Control Keypad

Optional Keypad for KP6 or KPL Keypad:

NOT A STAND ALONE KEYPAD

In-wall Decora® style single-gang keypad accessory adds source control and numeric control capability to KP6 and KPL keypads. Amber backlit soft-touch buttons.

(1.85"W x 2.7"D x 1"H (4.7 x 6.9 x 2.5 cm) **Wall plates not included.** *Not compatible with CAS44

1210-528415: KPSC

Shipping Weight 3 oz. (85 g)



Color Conversion Kit for KPSC

Includes (6) Decora® inserts.

1210-525452: White

1210-525469: Almond

1210-525476: Bone

1210-525483: Black

1210-525490: Brown

Shipping Weight 2oz (.1kg)



CAA System Remote Control

The SRC1 Remote Control is designed for use with Russound controllers and keypads in CAA66, CAM6.6, CAV6.6 and RNET® systems. The SRC1 is a system remote only and does not support learning IR codes.

1210-524127: SRC1

Shipping Weight 4 oz. (113 g)



Complete CAS44 System with (4) LCD Keypads

CAS44 controller with 4 KPL LCD keypads, (2) 1584.1 dual emitters, rack ears, punchdown tool, (1) learning programmed system remote control, (1) IR link cable. Features: (4) zones (40W per zone), (4) audio source inputs, (2) common IR outputs, mute 12V trigger in, 12V trigger out, rear RS-232 serial port, color-coded detachable 14 gauge snap connectors and rack-mount 2U high (rack ears included). Decora® style KPL single-gang keypad has amber backlit LCD, source selection, system status indication plus IR pass-through and confirmation.

17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

White & Almond wall plates included

1210-528361: CAS44L

1210-525711: CAS44L EU

1210-525728: CAS44L UK

Shipping Weight 27 lbs. (12.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



Complete CAS44 System with (4) System Keypads

CAS44 controller with (4) KP4 system keypads, (2) 1584.1 dual emitters, rack ears, punchdown tool, (1) CAS-RC learning programmed system remote control, (1) IR link cable. Features: (4) zones (40W per zone), (4) audio source inputs, (2) common IR outputs, mute 12V trigger in, 12V trigger out, rear RS-232 serial port, color-coded detachable 14 gauge snap connectors and rack-mount 2U high (rack ears included). Decora® style KP4 single-gang keypad has amber backlit buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

White & Almond wall plates included

1210-528378: CAS44K US

1210-525780: CAS44K EU

1210-525797: CAS44K UK

Shipping Weight 27 lbs. (12.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



Controller Amplifier: Simple 4 source/4 zone

CAS44: (4) four zones (40 Watts per zone) and rear RS-232 serial ports, color-coded detachable 14-gauge snap connectors and rack-mount 2-unit high. (2) 1584.1 Dual head IR emitter, Controller Only, No keypads. Rack ears included. 17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-524899: CAS44 US

1500-525841: CAS44 EU

1500-525858: CAS44 UK

Shipping Weight 23 lbs. (10.4 kg)



Advanced Programming Cable

Advanced programming cable for UNO-S1, KP4, KP6, KPL keypads, ComPoint components (ISK1, ISK2, ISK3, ISH1), and iBridge Dock. Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065

Shipping Weight 1 lbs. (0.45 kg)



LCD Keypad for CAA66 and CAS44 Systems

In-wall Decora® style single-gang keypad features backlit LCD panel, amber backlit soft-touch buttons, assignable source names, IR pass-through, 110 punchdown connector, system status feedback, user adjustable zone bass, treble, loudness and balance. 1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm)

Wall plates not included.

1210-528385: White & Almond KPL

Shipping Weight 4.5 oz. (127.6 g)



Color Conversion Kit for KPL

Includes (6) Decora® inserts.

1210-525100: White

1210-525117: Almond

1210-525124: Bone

1210-525131: Black

1210-525148: Brown

Shipping Weight 2oz (.1kg)



System Keypad for CAS44 Systems

In-wall Decora® style single-gang keypad features amber backlit soft-touch buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 110 punchdown connector, installer adjustable zone bass, treble, loudness and balance.

1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm)

Wall plates not included.

1210-528408: White & Almond KP4

Shipping Weight 4.0 oz. (113 g)



Color conversion kit for KP4

Includes (6) Decora® inserts.

1210-525254: White

1210-525261: Almond

1210-525278: Bone

1210-525285: Black

1210-525292: Brown

Shipping Weight 2oz (.1kg)




CAS44 System Remote Control

The CAS-RC Remote Control is designed for use with the Russound CAS44 controller amplifier and system keypads (KP6, KP4, and KPL). It is designed to operate source devices and the audio system keypad, and is preprogrammed to control Russound components ST2 Tuner and SMS3 Media Server. The CAS-RC controls up to four devices.

1210-524134: CAS-RC

Shipping Weight 4.0 oz. (113 g)

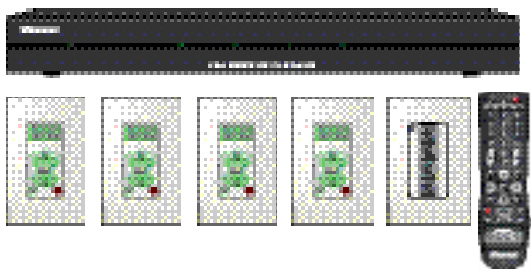

CA4 Multiroom Kit

Kit includes

- (1) CA4 controller
- (4) CA4-KP system keypads
- (1) CA4-WP Wall Port
- (4) 845.1 single emitters
- (1) CA4-RC System remote
- (1) Pair rack ears

1200-530418: CA4-KT1

1200-530425: CA4-KT1-EU*

1200-530432: CA4-KT1-UK*

Shipping Weight 14.60 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



CA4 Multiroom Controller Amplifier System Components



CA4 Multizone Controller

4 source/4 zone Rack mount, Source grouping, party mode, fixed and variable line outputs, 1-unit high, (4) four zones (30 Watts per zone), rear RS-232 port, RJ-45 expander jack, (4) 845.1 single emitters. Controller only, no keypads.

Rack ears included.

1200-529689: CA4

1200-530449: CA4-EU

1200-530456: CA4-UK

Shipping Weight 11 lbs



CA4 Wall Port

Single-gang, in-wall port for connection of a CA4 Multizone Controller to four system zone keypads and speakers. (4) RJ-45 inputs, (4) RJ-45 outputs, (4) speaker terminal pairs.

Wall plates not included.

1200-529719: CA4-WP (white)

Shipping Weight Call



CA4 System Keypad

Single-gang, in-wall Decora® style keypad for control of a CA4 Multizone audio system. (1) RJ-45 connection.

Wall plates not included.

1200-529696: CA4-KP (white)

Shipping Weight 0.1 oz.



Color Conversion Kit for CA4-KP

Includes (4) Decora® inserts. Also includes (1) Wall Port insert

1200-531057: White

1200-531064: Almond

1200-531095: Bone

1200-531071: Black

1200-531088: Brown

Shipping Weight 2oz (.1kg)



CA4 System Remote Control

Advanced IR learning and pre-programmed remote control for CA4 Multizone Controller. It is designed to operate source devices and the CA4 Multizone audio system keypads. Controls up to four devices.

1200-529702: CA4-RC

Shipping Weight 0.4 oz

A-BUS Multisource Kits

**Six-Source/Eight-Zone Controller Kit**

- (1) A-C68 Multizone Controller
- (6) A-K5L Amplified LCD Keypads
- (1) A-SRC1 System Remote
- (6) 845.1 IR Emitter

2000-527661: A-C560

2000-529733: A-C560-EU*

2000-529740: A-C560-UK

Shipping Weight 18.5 lbs*

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**PRICE****Four-Source/Four-Zone Kit with Local Source Input**

- (1) A-H484 Multisource Multizone Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (4) 845.1 IR Emitter
- (1) A-PS Power Supply

2000-527678: A-M341

2000-529757: A-M341-EU*

2000-529764: A-M341-UK*

Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplate

CALL FOR PRICING**PRICE****Four-Source/Four-Zone Kit (International only)**

- (1) A-H484 Multisource Multizone Hub
- (4) A-KP- EU Amplified Keypads
- (1) A-LRC2 Learning Remote
- (4) 845.1 IR Emitter
- (1) A-PS Power Supply

2000-529771: A-ME40-EU

2000-529788: A-ME40-UK

Shipping Weight 5 lbs

PRICE

A-BUS Decora Style, Single-Source Kits

**Decora Style (In-wall) Single-Source/Two-Zone Kit**

- (1) A-H4D In-wall Hub
- (2) A-VC2 Ampl. Volume Controls
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527753: A-D120

2000-529924: A-D120-EU

2000-529931: A-D120-UK

Shipping Weight 3.2 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**PRICE****Decora Style (In-wall) Single-Source/Two-zone Kit with Remote Control**

- (1) A-H4D In-wall Hub
- (2) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527760: A-D320

2000-529948: A-D320-EU

2000-529955: A-D320-UK

Shipping Weight 4.0 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**PRICE****Decora style (in-wall) Single-Source/Four-Zone Kit with Remote Control**

- (1) A-H4D In-wall Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527784: A-D340

2000-529986: A-D340-EU

2000-529993: A-D340-UK

Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**PRICE****Decora style (in-wall) Single-Source/Four-Zone Kit with Remote Control and Local Source Input**

- (1) A-H4D In-wall Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527791: A-D341

2000-530005: A-D341-EU

2000-530012: A-D341-UK

Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**PRICE**



Decora Style (in-wall) Two-Zone Expansion Kit (for A-H4D)

- (1) A-H4Dx Expansion Hub
- (2) A-K3 Amplified Keypads
- (1) A-PS Power Supply



2000-527838: A-X320

2000-530081: A-X320-EU

2000-530098: A-X320-UK

Shipping Weight 3 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



Decora Style (in-wall) Four-Zone Expansion Kit (for A-H4D)

- (1) A-H4Dx Expansion Hub
- (4) A-K3 Amplified Keypads
- (1) A-PS Power Supply
- (1) Punchdown Tool



2000-527845: A-X340

2000-530104: A-X340-EU

2000-530111: A-X340-UK

Shipping Weight 3 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

A-BUS Structured Wiring, Single-Source Kits (International ONLY)



Single-Source/Four-Zone Kit with Remote Control (International only)

- (1) A-H4 Surface Mount Hub
- (4) A-KP-EU Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-530524: A-SE40-EU*

2000-530517: A-SE40-UK*

CALL FOR PRICING



Single-Source/Four-Zone Kit with Remote Control and Local Source Input (International only)

- (1) A-H4 Surface Mount Hub
- (4) A-KP-EU Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-529900: A-SE41-EU*

2000-529917: A-SE41-UK*

CALL FOR PRICING



A-BUS Structured Wiring, Single-Source Kits



Single-Source/Two-Zone Kit with Remote Control

- (1) A-H2 Surface Mount Hub
- (2) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-527708: A-S320

2000-529825: A-S320-EU

2000-529832: A-S320-UK

Shipping Weight 3.5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



Single-Source/Four-Zone Kit with Remote Control

- (1) A-H4 Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-527722: A-S340

2000-529863: A-S340-EU

2000-529870: A-S340-UK

Shipping Weight 4.7 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



Single-Source/Four-Zone Kit with Remote Control and Local Source Input

- (1) A-H4 Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply

2000-527739: A-S341

2000-529887: A-S341-EU

2000-529894: A-S341-UK

Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING



A-BUS Remote Input, Single-Source Kits

**Remote Source, Single-Source/Two-Zone Kit with Remote Control**

- (1) A-H1 Audio Interface Hub
- (1) A-H4P Surface Mount Hub
- (2) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527807: A-R320

2000-530029: A-R320-EU

2000-530036: A-R320-UK

Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**Remote Source, Single-Source/Four-Zone Kit with Remote Control**

- (1) A-H1 Audio Interface Hub
- (1) A-H4P Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527814: A-R340

2000-530043: A-R340-EU

2000-530050: A-R340-UK

Shipping Weight 6 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING**Remote Source, Single-Source/Four-Zone Kit with Remote and Local Source Input**

- (1) A-H1 Audio Interface Hub
- (1) A-H4P Surface Mount Hub
- (4) A-K3 Amplified Keypads
- (1) A-LRC2 Learning Remote
- (1) A-LC3 Local Source Input
- (1) 1584.1 Dual IR Emitter
- (1) A-PS Power Supply
- (1) Punchdown Tool

2000-527821: A-R341

2000-530067: A-R341-EU


2000-530074: A-R341-UK

Shipping Weight 6 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

A-BUS Multi-source Controller and Hub

**6 Source/8 Zone multizone controller**

Rack mount, 1-unit high, rear RS-232 port, (2) RJ-45 expander jacks, (6) 845.1 single emitters. IR library, learning and paging. Controller only, no keypads. Rack ears included.

2000-527432: A-C68MSRP
\$1,598.00Dealer
\$799.00**4 Source/4 Zone Surface Mount Hub**

4 Pairs of gold plated audio RCA jacks, (4) Routed IR emitter jacks, (1) Common IR Jack, (8) RJ-45 keypad connectors, (1) 12 Volt trigger output, (2) Power supply jacks. 6.5" W x 5" H x 1.5" D (165 x 127 x 38 mm)

2000-115882: A-H484

Shipping Weight 2.25 lbs (.5kg)



A-BUS Single Source

**1 Source/2 Zone Surface Mount Hub**

Gold plated audio input RCA jacks, (4) IR emitter jacks, (2) RJ-45 keypad connectors, (1) Expansion input, IR confirmation LED. 6.5" W x 2" H x 1.5" D (165 x 51 x 38 mm)

2000-115837: A-H2

Shipping Weight 7 oz. (198 g)

**1 Source/4 Zone Surface Mount Hub**

Gold plated audio input/output RCA jacks, (4) IR emitter jacks, (4) RJ-45 keypad connectors, RJ-45 IR link input and output, IR confirmation LED. Requires A-PS power supply. 6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-115851: A-H4

A-BUS Remote Source Components

**1 Source A-BUS Audio Interface**

Uses standard RJ45 jack. Supports A-BUS hubs like the A-H4P, A-H4. IR emitter outputs for source control. 6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-121845: A-H1

Shipping Weight 7 oz. (198 g)

**4 Zone Hub Panel**

Single input structured wiring A-BUS Audio Distribution Hub. Requires A-BUS ready source or A-H1 Audio Interface Hub. Uses 110 punchdown connectors and CAT-5 for easy hookup. Requires A-PS power supply. 6.5" W x 3" H x 1.25" D (165 x 76 x 32 mm)

2000-121852: A-H4P

Shipping Weight 8 oz. (226 g)



A-BUS Decora Style Components

**In-wall, 4 Zone Single Source Hub**

Fits in a standard double gang work box. Gold plated audio input and output RCA jacks, (4) IR emitter jacks, 110 punchdown terminals, 24 VDC power and 12 VDC status jacks. **Wall plates not included** 3.625" W x 4.125" H x 1.125" D (9.2 x 10.5 x 4.8 cm)

2000-528224: White/Almond A-H4D

2000-117831: Bone A-H4D

2000-116056: Black A-H4D

2000-117855: Brown A-H4D

**Expansion Hub**

Plugs into existing A-H4D hub for 4 additional zones. Requires A-PS and A-H4D. Installation requires a three-gang work box.

*Wall plates not included with keypads.

6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-528231 White/Almond A-H4DX**2000-117893 Bone A-H4DX****2000-117909 Black A-H4DX****2000-117916 Brown A-H4DX**

Shipping Weight 1 lbs (.5kg)





A-BUS Amplified LCD Keypad

LCD panel and IR receiver, tone control, pre-amp output, up to 12-source selection, RJ-45 connector to controller, for use with A-C68.
Wall plates not included.

2000-527654: Wht/Alm. A-K5L



A-BUS Source Control Keypad

11-button keypad connects to A-K5L to add numeric and transport control of sources, for use with A-K5L and A-C68.
Wall plates not included.

2000-527463: Wht/Alm. A-KSC



A-BUS Amplified Keypad

IR receiver, pre-amp outputs, left and right gain controls with RJ-45 connector.
Wall plates not included.

2000-527449: Wht/Alm. A-K3



A-BUS Local Source Input

IR emitter for local source control, auto sensing to override audio, wires between hub or controller and keypad.

Wall plates not included.

2000-527456: Wht/Alm. A-LC3



A-BUS Amplified LCD Keypad Conversion kits

2000-528682: A-K5L, 4 White
2000-528699: A-K5L, 4 Almond
2000-528705: A-K5L, 4 Bone
2000-528729: A-K5L, 4 Brown
2000-528712: A-K5L, 4 Black



A-BUS Source Control Keypad Conversion kits

2000-528781: A-KSC, 4 White
2000-528798: A-KSC, 4 Almond
2000-528804: A-KSC, 4 Bone
2000-528828: A-KSC, 4 Brown
2000-528811: A-KSC, 4 Black



A-BUS Amplified Keypad Conversion kits

2000-528637: A-K3, 4 White
2000-528644: A-K3, 4 Almond
2000-528651: A-K3, 4 Bone
2000-528675: A-K3, 4 Brown
2000-528668: A-K3, 4 Black



A-BUS Local Source Input Conversion kits

2000-528736: A-LC3, 4 White
2000-528743: A-LC3, 4 Almond
2000-528750 A-LC3, 4 Bone
2000-528767 A-LC3, 4 Brown
2000-528774 A-LC3, 4 Black



A-BUS Amplified Volume Control.

Features system status indicator, pre-amp outputs, L&R channel gain controls with 110 punchdown termination. **Do not use with multi-source A-BUS Controller or Hub.**

1.3125" W x 2.5" H x 1.5" D
(33.5 x 63.5 x 38.5 mm)

2000-528217: Wht/Alm. A-VC2

2000-521201: Bone A-VC2

2000-521188: Brown A-VC2

2000-521218: Black A-VC2

Shipping Weight 5oz (.1kg)



A-BUS Amplified Keypad, Euro Style

45x45mm Euro style with IR, pre-amp outputs, L&R channel gain controls, backlit, volume and status indicators, source selection when used with the A-H484 Multi-Source Hub, fits in a 48mm wall box. **Wall plates not included.**

2000-118838: White A-KP EU

2000-118821: Black A-KP EU



Color conversion kits for in-wall hubs

(1) Decora Audio Plate, (1) Decora® IR Plate, (1) A-H4Dx Decora Plate.

2000-521928: White A-H4D CONV

2000-118739: Almond A-H4D CONV

2000-118708: Bone A-H4D CONV

2000-118722: Black A-H4D CONV

2000-118715: Brown A-H4D CONV

Shipping Weight 2oz (.1kg)



A-BUS System Remote Control (for A-C68)

A-BUS system remote control for A-C68, features source selection and control for up to six system sources and one local source.

2000-526749: A-SRC1



A-BUS Learning Remote Control

Learning-programmed remote control. Features source selection and control for up to seven devices and A-BUS system keypads. Pre-programmed with most major brands of audio and video equipment, can learn IR commands, works well as a standalone home theater remote.

2000-526732: A-LRC2



A-BUS Line Level Output Module

Provides a fixed-level stereo line output from an A-BUS hub keypad port or other A-BUS-ready multiroom controller to an external amplifier or receiver. RJ45 CAT-5 cable connection, RCA jacks for left-right audio, IR receiver input terminals: 3.33" W x 2.38" H x 1.59" D (8.4 x 6.0 x 4.0 cm)

2000-526473: A-OM

Ship Weight 5.6 oz (158 g)



A-BUS® Power Supply.

24 Volt DC. Features: Autosensing 110/220 volt-age, detachable power cord, compact size. 6.5" W x 2.75" H x 3.75" D (165.5 x 70 x 95.5 mm)

2000-113833: A-PS US

2000-114557: A-PS-EU

2000-114847: A-PS-UK

Shipping Weight 1.25 lbs (.57 kg)



Smart Media Servers



Smart Media Server 320

Three independent music streams, 320GB hard drive for plenty of storage, CD-ROM drive for loading music. Supports TV or monitor display, web based user interface, and IR remote control. Delivers metadata to RNET keypads. Includes: (1) SMS3-320 Media Server, (1) SMS3-RC Remote Control, (3) RCA cables, (1) Composite Video cable, Pair rack-mount ears, power supply. Rack-mountable 1u high. 17" W x 12.9" D x 1.75" H (43 x 20.3 x 4.4 cm)

2420-532818: SMS3-320 US

2420-532825: SMS3-320-EU/UK

Shipping Weight 22.7 lbs (10.3 kg)



Smart Dual Tuners



ST2 Smart Tuner

Dual AM/FM tuner. Can be used in an IR-controlled, A-BUS or RNET-enabled system. Stores up to 72 station presets with custom naming. Includes AM and FM antennas (2 each), RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1 unit high. 17" W x 12.9" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-121906: ST2 US

2410-520129: ST2-EU

2410-520143: ST2-UK

Shipping Weight 10.5 lbs (4.7 kg)



ST2-KP

The ST2-KP Smart Tuner keypad allows you to view Station feedback and lets you select your favorite preset station in any non-RNET system where a tuner display and control is desired. *Wall plates not included with keypads.

1.3125" W x 2.5" H x 1.375" D (33.5 x 63.5 x 35 mm)



2410-520846: White

2410-520853: Almond

2410-520860: Bone

2410-520884: Black

2410-520877: Brown

Shipping Weight 3oz (.1 kg)



Satellite radio service is available in the
UNITED STATES & CANADA ONLY



- Over 150 channels of Music
- News, talk, sports and traffic
- Digital quality audio

RNET

Smart Dual Tuner with XM

1 AM/FM tuner and 1 XM tuner. Seek and scan functions. Stores up to 72 station presets with custom naming. Includes AM and FM antennas, XM antenna, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. RG6 to SMB adapter cable. Rack-mountable at 1 unit high. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-521072: ST2-XM

Shipping Weight 9.9 lbs (4.5 kg)



- Over 150 channels of Music
- News, talk, sports and traffic
- Digital quality audio

RNET

Smart Dual XM Tuner

2 XM tuners. Seek and scan functions. Stores up to 72 station presets with custom naming. Includes (2) XM antennas, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1 unit high. RG6 to SMB adapter cable. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-522017: ST2-XM2

Shipping Weight 10.25 lbs (4.65kg)



- 100% commercial free Music
- Over 120 channels of music, news, talk, sports and traffic

RNET

Smart Dual Tuner with Sirius

1 AM/FM tuner and 1 SIRIUS tuner. SIRIUS antenna, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1U. RG6 to SMB adapter cable. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-524462: ST2-S

Shipping Weight 10.5 lbs (4.8kg)



iBridge Systems



RNET

iBridge Dock Kit


Allows you to use an iPod as a remote source for a Russound RNET or other multiroom audio-video system. Used with a Russound RNET A/V Decoder, it provides either RNET or infrared (IR) control of the iPod, depending on the type of system.

2430-526541: BGK1

2430-526589: BGK1 EU

2430-526596: BGK1 UK

Shipping Weight 3.7 lbs (1.7 kg)



RNET

iBridge Bay Kit

The complete solution for integrating iTunes® media from a Intel® Core Duo Mac® desktop or MacBook® with an RNET® multiroom system. Kit includes: (1) BGB2 iBridge Bay, (1) RAVD1 RNET A/V Decoder, (1) 12 VDC 1A power supply, (2) RJ-45 patch cables, (1) USB cable, (1) composite video cable, (1) stereo mini patch cable, (1) stereo RCA patch cable

2430-527005: BGK2

2430-527371: BGK2 EU

2430-527388: BGK2 UK

Shipping Weight 3.5 lbs (1.6 kg)



RNET

iBridge Power Dock Kit

Allows the retrofit of an iPod as a remote source for a Russound RNET multiroom audio-video system. Using RNET Power Line Carrier (PLC) technology, the Power Dock kit transmits audio, control, and metadata signals over residential 110V power lines. Kit includes: (1) BGD2 iBridge Power Dock, (1) BGDA Dock Adapter, (1) BGCA Controller Adapter, (1) power cord, (5) iPod wall adapters, (1) RJ-45 patch cable.

2430-530180: BGK3 (110 VAC ONLY)

Shipping Weight 3.7 lbs (1.7 kg)



Video

**Composite Video Connector**

Premium gold plated RCA. Converts composite video signal from RCA to CAT-5 cable. Sold in pairs.

Works up to 2200 feet

7103-121876: MOD-VB

Shipping Weight 2 oz (.05g)

**Active Component Video Balun Kit**

Send component video over CAT-5 up to 500 feet point-to-point. Includes the HDTX, HDRX and 12VDC 200mA power supply.

Not for sale in countries with CE requirements

9590-526220: VBHD Kit

Shipping Weight 1.25 lbs. (.68 kg)

**Active Composite Audio-Video Balun Kit**

Send composite video and audio over CAT-5 up to 1000 feet point to point. Includes the CTX, CRX and 12VDC 200mA power supply.

Not for sale in countries with CE requirements

9590-526237: VBC Kit

Shipping Weight 1.25 lbs. (.68 kg)



HD Video Matrix for RNET: 4 Zone Systems

Free Video Matrix Configuration Software Now Available

Russound's new VM1 Configuration Tool allows for the custom assignment of Video Matrix inputs and outputs to specific Russound controller amplifier sources and zones.

For a copy of the VM1 Configuration Tool software, instructions and the latest VM1 Video Matrix firmware, please visit Russound's Document Center online at www.russound.com/doccenter/doccenter.php

**Video Matrix 4 zone kit**

Four source, four zone high-definition Video Matrix system. RNET and RS-232 control capable. Includes: (1) 4x4 matrix (VM1), (1) power supply (A-PS) and 4 video receivers (VMR1)

EU & UK include Wall plates.

2210-527043: VM1-4

2210-527494: VM1-4 EU

2210-527500: VM1-4 UK

Shipping Weight 25 lbs. (11.3 kg)

**Video Matrix 4 zone kit with 2 zone up-conversion**

Four source, four zone high-definition Video Matrix system. S-video, NTSC or PAL composite video Up-conversion on two sources. RNET and RS-232 control capable. Includes: (1) 4x4 matrix (VM1), (1) power supply (A-PS) and (4) video receivers (VMR1)

EU & UK include Wall plates.

2210-527050: VM1-4UC

2210-527517: VM1-4UC EU

2210-527524: VM1-4UC UK

Shipping Weight 25 lbs. (11.3 kg)



HD Video Matrix for RNET: 8 Zone Systems

**Video Matrix 8 zone kit**

Eight source, eight zone high-definition Video Matrix system. RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (A-PS) and (8) video receivers (VMR1)

EU & UK include Wall plates.

2210-527067: VM1-8

2210-527531: VM1-8 EU

2210-527548: VM1-8 UK

Shipping Weight 25 lbs. (11.3 kg)

**Video Matrix 8 zone kit with 2 zone up-conversion**

Eight source, eight zone high-definition Video Matrix system. S-video, NTSC or PAL composite video Up-conversion on two sources. RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (APS) and (8) video receivers (VMR1)

EU & UK include Wall plates.

2210-527074: VM1-8UC

2210-527555: VM1-8UC EU

2210-527562: VM1-8UC UK

Shipping Weight 25 lbs. (11.3 kg)

**Video Matrix 8 zone kit with 4 zone up-conversion**

Eight source, eight zone high-definition Video Matrix system. S-video, NTSC or PAL composite video Up-conversion on four sources. RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (APS) and (8) video receivers (VMR1)

EU & UK include Wall plates.

2210-527081: VM1-8UC2

2210-527579: VM1-8UC2 EU

2210-527586: VM1-8UC2 UK

Shipping Weight 25 lbs. (11.3 kg)





Acclaim 5 Series 4" Outdoor 2-way, 100 Watts

Woofer: 4" IMPP cone, Tweeter: 1" Teteron™ Mounting Options: Bookshelf foot, pole, flat or corner surface, Terminals: 12 gauge spring terminal Bookshelf foot included, 10 - 100 watts, 8 ohm, Dimensions: 9.5" x 6.25" x 6.25 (24.13 x 15.87 x 15.87 cm)

3165-532832: White 5B45

3165-532870: Black 5B45

Shipping Weight: 3.9 lbs. (1.8 kg)



Acclaim 5 Series 5.25" Outdoor 2-way, 125 Watts

Woofer: 5.25" IMPP cone, Tweeter: 1" Teteron, Mounting Options: Bookshelf foot, pole, flat or corner surface, Terminals: 12 gauge spring terminal, Bookshelf foot included, 10 - 125 watts, 8 ohm. Dim: 11.25" x 7.5" x 7.5" (28.57 x 19.05 x 19.05 cm)

3165-532849: White 5B55

3165-532887: Black 5B55

Shipping Weight: 5.4 lbs. (2.4 kg)



Acclaim 5 Series 6.5" Outdoor 2-way, 150 Watts

Woofer: 6.5" IMPP cone, Tweeter: 1" Teteron, Mounting Options: Bookshelf foot, pole, flat or corner surface, Terminals: 12 gauge spring terminal, Bookshelf foot included, 10- 150 watts, 8 ohm, Dimensions: 13" x 8.75" x 8.25" (33.02 x 22.22 x 20.95 cm)

3165-532856: White 5B65

3165-532894: Black 5B65

Shipping Weight: 7.1 lbs. (3.2 kg)



Acclaim 5 Series 6.5" Outdoor Single Point Stereo, 150 Watts

Woofer: 6.5" (165 mm) IMPP cone, Tweeter: (2) 1" (25 mm) Teteron, Mounting Options: Pole, flat or corner surface, Terminals: 12 gauge spring terminal, 10 - 150 watts, 8 ohm/8 ohm, Dim: 13" x 8.75" x 8.25" (33.02 x 22.22 x 20.95 cm)

3165-532863: White 5B65S

3165-532900: Black 5B65S

Shipping Weight: 7.2 lbs. (3.3 kg)

Acclaim™ 5 Series



Acclaim 5 Series 5.25" In-Ceiling Single Point Stereo, 75 watts

In-ceiling Single Point Stereo speaker
5.25" vacuum formed polypropylene woofer with two 0.5" pivoting PEI tweeters, power handling from 10 – 75 watts total at 6 ohms per channel.

3165-530586 :5C51S

Shipping Weight 3.15 lbs (1.42 kg)



Acclaim 5 Series 6.5" In-Ceiling Single Point Stereo, 75 watts

In-ceiling Single Point Stereo speaker
6.5" vacuum formed polypropylene woofer with two 0.5" pivoting PEI tweeters, power handling from 10 – 75 watts total at 6 ohms per channel

3165-530609: 5C61S

Shipping Weight 3.95 lbs (1.79 kg)



Acclaim 5 Series 6.5" In-Ceiling Single Point Stereo, 100 watts

In-ceiling Single Point Stereo speaker
6.5" injection molded polypropylene and Kevlar woofer with two 0.5" pivoting silk tweeters, power handling from 10 – 100 watts total at 6 ohms per channel.

3165-530623: 5C64S

Shipping Weight 3.99 lbs (1.8 kg)



Acclaim 5 Series 8" In-Ceiling Single Point Stereo, 150 watts

In-ceiling Single Point Stereo speaker 8.0" aluminum woofer with two 1.0" pivoting titanium tweeters, power handling from 10 – 150 watts total at 6 ohms per channel

3165-530661: 5C85S

Shipping Weight 6.08 lbs (3.78 kg)



Acclaim 5 Series 5.25" In-Ceiling, 75 watts

2-way in-ceiling speaker pair
5.25" vacuum formed polypropylene woofer with a 0.5" pivoting PEI tweeter,
power handling from 10 – 75 watts at 8 ohms

3165-530579: 5C51

Shipping Weight 5.8 lbs (2.63 kg)



Acclaim 5 Series 6.5" In-Ceiling, 75 watts

2-way in-ceiling speaker pair
6.5" vacuum formed polypropylene woofer with a 0.5" pivoting PEI tweeter,
power handling from 10 – 75 watts at 8 ohms

3165-530593: 5C61

Shipping Weight 7.39 lbs (3.35 kg)



Acclaim 5 Series 6.5" In-Ceiling, 85 watts

2-way in-ceiling speaker pair
6.5" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 85 watts at 8 ohms

3165-530616: 5C62

Shipping Weight 7.69 lbs (3.48 kg)



Acclaim 5 Series 8" In-Ceiling, 125 watts

2-way in-ceiling speaker pair
8.0" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 125 watts at 8 ohms

3165-530630: 5C82

Shipping Weight 10.67 lbs (4.89 kg)



Acclaim 5 Series 8" In-Ceiling, 150 watts

2-way in-ceiling speaker pair
8.0" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 150 watts at 8 ohms

3165-530647: 5C84

Shipping Weight 10.89 lbs (4.93 kg)



Acclaim 5 Series 8" In-Ceiling, 150 watts

2-way in-ceiling speaker pair
8.0" aluminum woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 150 watts at 6/8 ohms

3165-530654: 5C85

Shipping Weight 10.96 lbs (4.97 kg)



Acclaim 5 Series 6.5" In-Wall, 85 watts

2-way in-wall speaker pair
6.5" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter,
power handling from 10 – 85 watts at 8 ohms

3165-530678: 5W62

Shipping Weight 9.13 lbs (5.67 kg)



Acclaim 5 Series 6.5" In-Wall, 100 watts

2-way in-wall speaker pair
6.5" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter, power
handling from 10 – 100 watts at 8 ohms

3165-530685: 5W64

Shipping Weight 9.22 lbs (4.19 kg)



Acclaim 5 Series 8" In-Wall, 175 watts

2-way in-wall speaker pair
8.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 175 watts at 6/8 ohms

3165-530692: 5W87

Shipping Weight 13.34 lbs (6.05 kg)

Acclaim® architectural loudspeakers

Model	Type	Woofer	Woofer Material	Tweeter	Tweeter Material	Frequency Range (-6dB/+0dB)
Acclaim 5 Outdoor Speaker						
5B45	2-way	4"	IMPP cone	25mm	Teteron	80Hz - 20kHz
5B55	2-way	5.25"	IMPP cone	25mm	Teteron	72Hz - 20kHz
5B65	2-way	6.5"	IMPP cone	25mm	Teteron	64Hz - 20kHz
5B65S	Single-Point-Stereo	6.5"	IMPP cone	(2)25mm	Teteron	62Hz - 20kHz
Model	Type	Woofer	Woofer Material	Tweeter	Tweeter Material	Frequency Range (-6dB/+0dB)
5 Series In-Ceiling						
5C51	2-way	5.25"	Vacuum Form Polypropylene	13mm	PEI	54Hz-20kHz
5C51S	Single-Point Stereo	5.25"	Vacuum Form Polypropylene	13mm	PEI	49Hz-20kHz
5C61	2-way	6.5"	Vacuum Form Polypropylene	13mm	PEI	46Hz- 20kHz
5C62	2-way	6.5"	Vacuum Form Polypropylene	25mm	Silk	46Hz-20kHz
5C61S	Single-Point Stereo	6.5"	Vacuum Form Polypropylene	13mm	PEI	43Hz-20kHz
5C64S	Single-Point Stereo	6.5"	IMPP W/ Kevlar Filler	13mm	Silk	40Hz-20kHz
5C82	2-way	8"	Vacuum Form Polypropylene	25mm	Silk	30Hz-20kHz
5C84	2-way	8"	IMPP W/ Kevlar Filler	25mm	Silk	28Hz-20kHz
5C85	2-way	8"	Aluminum	25mm	Titanium	32Hz-20kHz
5C85S	Single-Point Stereo	8"	Aluminum	25mm	Titanium	37Hz-20kHz
5 Series In-Wall						
5W62	2-way	6.5"	Vacuum Form Polypropylene	25mm	Silk	46Hz-20kHz
5W64	2-way	6.5"	IMPP W/ Kevlar Filler	25mm	Silk	44Hz-20kHz
5W87	2-way	8"	Woven Kevlar	25mm	Titanium	35Hz-20kHz
7 Series In-Ceiling						
7C51	2-way	5.25"	Vacuum Form Polypropylene	13mm	PEI	45Hz-20kHz
7C57	2-way	5.25"	Yellow Kevlar	25mm	Al/Mg	47Hz-27kHz
7C72	2-way	7"	Vacuum Form Polypropylene	25mm	Silk	38Hz-20kHz
7C74	2-way	7"	IMPP Ribbed Cone	25mm	Silk	34Hz-20kHz
7C74S	Single-Point-Stereo	7"	IMPP Ribbed Cone	25mm	Silk	28Hz-20kHz
7C75	2-way	7"	Aluminum	25mm	Teteron	36Hz-20kHz
7C76	2-way	7"	Yellow Kevlar	25mm	Titanium	42Hz-22kHz
7C77	2-way	7"	Treated Black Kevlar	25mm	Al/Mg	42Hz-27kHz
7C78	2-way	7"	Carbon Fiber	25mm	Al/Mg	35Hz-27kHz
7C85	2-way	8"	Aluminum	25mm	Teteron	31Hz-20kHz
7C85S	Single-Point-Stereo	8"	Aluminum	25mm	Teteron	25Hz-20kHz
7C86	2-way	8"	Yellow Kevlar	25mm	Titanium	32Hz-22kHz
7 Series In-Wall						
7W75	2-way	7"	Aluminum	25mm	Teteron	36Hz-20kHz
7W76	2-way	7"	Yellow Kevlar	25mm	Titanium	42Hz-22kHz
7W77	2-way	7"	Treated Black Kevlar	25mm	Al/Mg	42Hz-27kHz
7W86	3-way	8"	Yellow Kevlar	25mm	Titanium	32Hz-22kHz
7W55LCR	2-way	5.25"	Aluminum	25mm	Teteron	44Hz-20kHz
7W57LCR	2-way	5.25"	Treated Black Kevlar	25mm	Al/Mg	41Hz-27kHz
7W51SFT	Single-Point-Stereo	5.25"	Vacuum Form Polypropylene	(2)13mm	PEI	50Hz - 20kHz
7W52FT	2-way	5.25"	Vacuum Form Polypropylene	25mm	Silk	51Hz - 22kHz

Grille Type	Sensitivity dB SPL (2.83V @ 1m)	Nominal Impedance	Max Amp. Power	Surface mount	Pole Mount	Bookshelf Stand	
Aluminum	88 dB	8 ohm	100W	Yes	Yes	Yes	
Aluminum	90 dB	8 ohm	125W	Yes	Yes	Yes	
Aluminum	91 dB	8 ohm	150W	Yes	Yes	Yes	
Aluminum	91 dB	8 ohm/8 ohm	150W	Yes	Yes	No	
Grille Type	Sensitivity dB SPL (2.83V @ 1m)	Nominal Impedance	Max Amp. Power	Feature	Cutout Dimensions	Depth	Rough-in Bracket
Steel	87 dB	8 ohm	75W	—NA—	6.75"	3"	SB-C50
Steel	87 dB	6 ohm/6 ohm	75W	—NA—	6.75"	3"	SB-C50
Steel	87 dB	8 ohm	75W	—NA—	8.375"	3.5"	SB-C67
Steel	87 dB	8 ohm	85W	—NA—	8.375"	3.5"	SB-C67
Steel	87 dB	6 ohm/6 ohm	75W	—NA—	8.375"	3.5"	SB-C67
Steel	88 dB	6 ohm/6 ohm	100W	—NA—	8.375"	3.5"	SB-C67
Steel	88 dB	8 ohm	125W	—NA—	9.875"	4.2"	SB-C80
Steel	89 dB	8 ohm	150W	—NA—	9.875"	4.2"	SB-C80
Steel	90 dB	6 ohm, 8 ohm	150W	—NA—	9.875"	4.2"	SB-C80
Steel	89 dB	6 ohm/6 ohm	150W	—NA—	9.875"	4.2"	SB-C80
Steel	87 dB	8 ohm	85W	—NA—	10.75" x 6.75"	3.3"	SB-W60
Steel	87 dB	8 ohm	100W	—NA—	10.75" x 6.75"	3.3"	SB-W60
Steel	90 dB	6 ohm, 8 ohm	175W	—NA—	13.375" x 8.75"	3.94"	SB-W80
Aluminum	87.5 dB	6 ohm	75W	Twist and tilt 15 degrees	6.75"	4.5"	SB-C50
Aluminum	88 dB	4, 5, 6 ohm	125W	Twist and tilt 15 degrees	6.75"	4.5"	SB-C50
Aluminum	91 dB	6 ohm	85W	Twist and tilt 15 degrees	8.375"	4.5"	SB-C67
Aluminum	90 dB	6 ohm	100W	Twist and tilt 15 degrees	8.375"	4.5"	SB-C67
Aluminum	90 dB	6 ohm/6 ohm	100W	Twist and tilt 15 degrees	8.375"	4.5"	SB-C67
Aluminum	90 dB	6 ohm	125W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	150W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	175W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	200W	Twist and tilt 15 degrees	8.375"	4.75"	SB-C67
Aluminum	91 dB	6 ohm	125W	Twist and tilt 15 degrees	9.875"	5.0"	SB-C80
Aluminum	91 dB	6 ohm/6ohm	125W	Twist and tilt 15 degrees	9.875"	5.0"	SB-C80
Aluminum	91 dB	4, 5, 6 ohm	150W	Twist and tilt 15 degrees	9.875"	5.125"	SB-C80
Aluminum	88 dB	6 ohm	125W	Iso-mount	13" x 8.25"	3.6"	SB-W70
Aluminum	90.5 dB	4, 5, 6 ohm	150W	Iso-mount	13" x 8.25"	3.9"	SB-W70
Aluminum	90.5 dB	4, 5, 6 ohm	175W	Iso-mount	13" x 8.25"	3.9"	SB-W70
Aluminum	90 dB	4, 5, 6 ohm	150W	Iso-mount	15.125" x 9.125"	3.9"	SB-W83
Aluminum	90 dB	4, 5, 6 ohm	100W	Iso-mount	7.25 x 14.25"	3.9"	SB-7LCR
Aluminum	90 dB	4, 5, 6 ohm	150W	Iso-mount	7.25 x 14.25"	3.9"	SB-7LCR
Magnetic Aluminum	88 dB	6 ohm/ 6 ohm	75W	Iso-Mount	7.4 x 7.4"	3.8"	SB-FT50
Magnetic Aluminum	88 dB	6 ohm	85W	Iso-Mount	7.4 x 7.4"	3.8"	SB-FT50



Acclaim 7 Series 7" In-Ceiling Single Point Stereo, 100 watts

In-ceiling Single Point Stereo, Twist & Tilt speaker
7.0" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter, power handling from 10 – 100 watts total at 6 ohms per channel

3155-529283: 7C74S

Shipping Weight 5.69 lbs (2.5 kg)



Acclaim 7 Series 8" In-Ceiling Single Point Stereo, 125 watts

In-ceiling Single Point Stereo, Twist & Tilt speaker
8.0" aluminum woofer with a 1.0" pivoting Teteron tweeter, power handling from 10 – 125 watts total at 6 ohms per channel

3155-529290: 7C85S

Shipping Weight 4.94 lbs (2.24 kg)



Acclaim 7 Series 5.25" In-Ceiling, 75 watts

2-way in-ceiling Twist & Tilt speaker pair
5.25" vacuum formed polypropylene woofer with a 0.5" pivoting polyamide tweeter, power handling from 10 – 75 watts at 6 ohms

3155-529061: 7C51

Shipping Weight 7.94 lbs (3.6 kg)



Acclaim 7 Series 5.25" In-Ceiling, 125 watts

2-way in-ceiling Twist & Tilt speaker pair
5.25" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter, power handling from 10 – 125 watts at 4/5/6 ohms

3155-529078: 7C57

Shipping Weight 9.7 lbs (6.65 kg)



Acclaim 7 Series 7" In-Ceiling, 85 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" vacuum formed polypropylene woofer with a 1.0" pivoting silk tweeter, power handling from 10 – 85 watts at 6 ohms

3155-529092: 7C72

Shipping Weight 10.25 lbs (4.14 kg)



Acclaim 7 Series 7" In-Ceiling, 100 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" injection molded polypropylene and Kevlar woofer with a 1.0" pivoting silk tweeter, power handling from 10 – 100 watts at 6 ohms

3155-529108: 7C74

Shipping Weight 10.30 lbs (4.67 kg)



Acclaim 7 Series 7" In-Ceiling, 125 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" aluminum woofer with a 1.0" pivoting Teteron tweeter, power handling from 10 – 125 watts at 6 ohms

3155- 529115: 7C75

Shipping Weight 11.35 lbs (5.19 kg)



Acclaim 7 Series 7" In-Ceiling, 150 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter, power handling from 10 – 150 watts at 4/5/6 ohms

3155-529122: 7C76

Shipping Weight 14.66 lbs (6.65 kg)



Acclaim 7 Series 7" In-Ceiling, 175 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter, power handling from 10 – 175 watts at 4/5/6 ohms

3155-529139: 7C77

Shipping Weight 14.66 lbs (6.65 kg)



Acclaim 7 Series 7" In-Ceiling, 200 watts

2-way in-ceiling Twist & Tilt speaker pair
7.0" carbon fiber woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter, power handling from 10 – 200 watts at 4/5/6 ohms

3155-529146: 7C78

Shipping Weight 14.66 lbs (6.65 kg)



Acclaim 7 Series 8" In-Ceiling, 125 watts

2-way in-ceiling Twist & Tilt speaker pair
8.0" aluminum woofer with a 1.0" pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms

3155-529153: 7C85

Shipping Weight 14.55 lbs (6.6 kg)



Acclaim 7 Series 8" In-Ceiling, 150 watts

2-way in-ceiling Twist & Tilt speaker pair
8.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529160: 7C86

Shipping Weight 14.99 lbs (6.8 kg)



Acclaim 7 Series 7" In-Wall, 125 watts

2-way in-wall Iso-Mount speaker pair
7.0" aluminum woofer with a 1.0" pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms

3155-529214: 7W75

Shipping Weight 14.77 lbs (6.7 kg)



Acclaim 7 Series 7" In-Wall, 150 watts

2-way in-wall Iso-Mount speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529221: 7W76

Shipping Weight 16.76 lbs (7.6 kg)



Acclaim 7 Series 7" In-Wall, 175 watts

2-way in-wall Iso-Mount speaker pair
7.0" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 175 watts at 4/5/6 ohms

3155-529238: 7W77

Shipping Weight 16.76 lbs (7.6 kg)



Acclaim 7 Series 8" In-Wall, 150 watts

3-way in-wall Iso-Mount speaker pair
8.0" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529245: 7W86

Shipping Weight 19.4 lbs (8.8 kg)



Acclaim 7 Series 5.25" In-Wall LCR, 100 watts

Passive 2-way LCR Iso-Mount speaker
5.25" aluminum woofer with a 1.0" pivoting Teteron tweeter,
power handling from 10 – 100 watts at 4/5/6 ohms

3155-529306: 7W55LCR

Shipping Weight 19.22 lbs (4.2 kg)



Acclaim 7 Series 5.25" In-Wall LCR, 150 watts

Passive 2-way LCR Iso-Mount speaker
5.25" woven Kevlar woofer with a 1.0" pivoting aluminum/magnesium alloy tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529313: 7W57LCR

Shipping Weight 9.84 lbs (4.63 kg)



Acclaim 7 Series 5.25" In-Wall Fixed Tilt, Single-Point-Stereo, 75 watts

2-way in-wall, single-point-stereo, fixed tilt w/Iso-Mount™ speaker 5.25" vacuum formed polypropylene woofer with Dual 1.0" tweeters, Magnetic grille, 10-75 watts at 6 ohm/ 6 ohm

3155-532214: 7W51SFT

Shipping Weight 9.9 lbs (4.5 kg)




Acclaim 7 Series 5.25" In-Wall, Fixed Tilt, 85 watts

2-way in-wall Fixed Tilt w/Iso-Mount™ speaker 5.25" vacuum formed polypropylene woofer with a 1.0" tweeter, Magnetic grilles, 10-85 watts at 6 ohms

3155-532221: 7W52FT

Shipping Weight 9.9 lbs (4.5 kg)

Low Power meet High-Efficiency Ratio: perfectly matched for amplified keypads

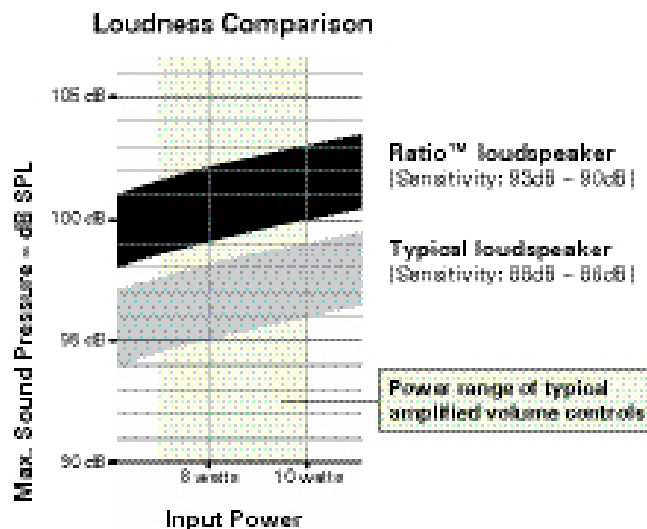

Ratio 6 1/2" In-Ceiling Single Point Stereo

6.5" dual voice coil polypropylene woofer, dual 0.5" (13 mm) polyetherimide dome tweeter, 8 ohms. Steel grilles included. Cut Out Dimension: 8.38" (21.3 cm) diameter

3200-526985: RC61S
Shipping Weight 4 lbs. (1.8 kg)



Ratio 6 1/2" In-Ceiling

6.5" (16.5 cm) polypropylene woofer, 0.5" (13 mm) polyetherimide dome tweeter, 8 ohms. Steel grilles included. Cut Out Dimension: 8.38" (21.3 cm) diameter

3200-526954: RC61
Shipping Weight 8 lbs. (3.6 kg)



Ratio 8" In-Ceiling

8" (20.3 cm) polypropylene woofer, 0.5" (13 mm) polyetherimide dome tweeter, 8 ohms. Steel grilles included. Cut Out Dimension: 9.88" (25.1 cm) diameter

3200-526961: RC81
Ship Weight 9.5 lbs. (4.3 kg)



Ratio 6" x 9" In-Call

Rectangular 2-way in-wall loudspeaker pair 6" x 9" (15.2 x 22.9 cm) polypropylene woofer, 0.5" (13 mm) polyetherimide dome tweeter, aluminum grille, 8 ohms. Cut Out Dimension: 6.75" W x 10.75" H (17.1 cm x 27.3 cm)

3200-526978: RW691
Ship Weight 9.5 lbs. (4.3 kg)



Ratio Indoor/Outdoor

Multipurpose indoor/outdoor speaker. Two-way design with 6" x 9" polypropylene woofer and 1/2" polyetherimide tweeter in a weather-resistant ABS enclosure. Complete with mounting bracket for on-wall installation.

3200-527357: RM691 White
3200-528620: RM691 Black
Ship Weight 11.3 lbs (5.1 kg)

Ratio® High-Efficiency Architectural Loudspeakers

Model	Description	Dimensions	Cut Out	Mount Depth	Woofer	Tweeter	Power	Impedance	Efficiency	Frequency Response
RC61S	6.5" single-point stereo round ceiling	9.8" (24.9 cm) diameter	8.38" (21.3 cm)	2.8" (7.1 cm)	6.5" (16.5 cm) polypropylene cone, Dual voice coil	(2) 1/2" (13 mm) polyetherimide domes	20W	8/8 ohm	93 dB	70 Hz - 20kHz ±3 dB
RC61	6.5" two-way round ceiling	9.8" (24.9 cm) diameter	8.38" (21.3 cm)	2.8" (7.1 cm)	6.5" (16.5 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	90 dB	76 Hz - 20kHz ±3 dB
RC81	8" two-way round ceiling	11.3" (28.7 cm) diameter	9.88" (25.1 cm)	3.4" (8.6 cm)	8" (20.3 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	92 dB	71 Hz - 20kHz ±3 dB
RW691	6" x 9" two-way wall	8.2" W x 12.2" H (20.8 x 31.0 cm)	6.75" W x 10.75" H (17.1 x 27.3 cm)	3.6" (9.1 cm)	6" x 9" (15.2 x 22.9 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	90 dB	64 Hz - 20kHz ±3 dB
RM691	Two-way indoor/outdoor surface-mount	23.6" W x 7.9" H x 8.0" D (60.0 x 20.1 x 20.3 cm)	NA	8.0"-9.25" (20.3-23.5 cm)	6" x 9" (15.2 x 22.9 cm) polypropylene cone	1/2" (13 mm) polyetherimide dome	20W	8 ohm	94 dB	85 Hz - 20 kHz ±3 dB

Rough-In Speaker Brackets



5.25" In-ceiling
Rough-in Bracket
3901-530715:
SB-C50

6-Pack
3901-531804:
SB-C50-6P




6.5" In-ceiling
Rough-in
Bracket
3901-530722:
SB-C67

6-Pack
3901-531811:
SB-C67-6P




8" In-ceiling
Rough-in
Bracket
3901-530739:
SB-C80

6-Pack
3901-531828:
SB-C80-6P




6.25" In-wall
Rough-in
Bracket
3901-530746:
SB-W60

6-Pack
3901-531835:
SB-W60-6P



8" In-wall
Rough-in
Bracket
3901-530760:
SB-W80

6-Pack
3901-531859:
SB-W80-6P




5.25" LCR
In-wall
Rough-in
Bracket
3901-530791:
SB-7LCR

6-Pack
3901-531880:
SB-7LCR-6P



Acclaim 7 Series
7" In-wall
Rough-in
Bracket
3901-530753:
SB-W70

6-Pack
3901-531842:
SB-W70-6P







Acclaim 7 Series
8" 3-way In-wall
Rough-in
Bracket
3901-530777:
SB-W83

6-Pack
3901-531866:
SB-W83-P

Flexbox Back boxes

Flexbox

speaker back boxes reduce background noise, provide a moisture barrier, diffuse distortion, and improve sound quality. The flexible construction allows for easy installation in retrofit or new construction settings. Both models are flame retardant and meet ASTM E119 and UL 263/ NFPA 251 (1-hour) and ASTM E84/ NFPA 70 standards.

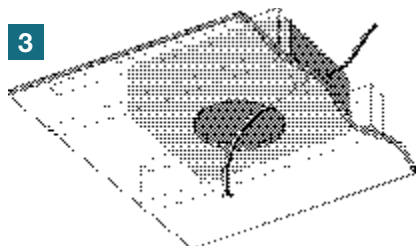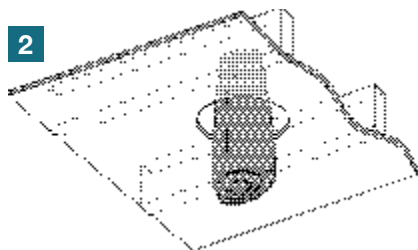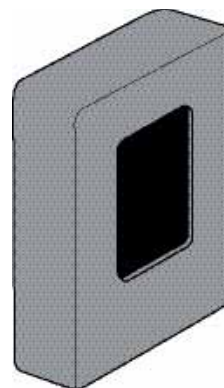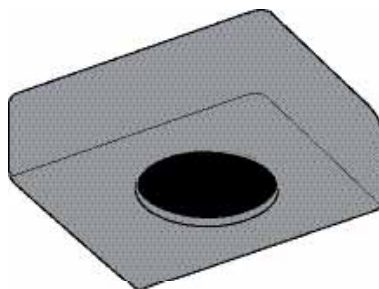

Flexbox Fire Rated In-Ceiling Back Box

Dim: 14"W x 6"D x 17.5"H (355 x 152 x 445 mm)
Material Thickness: 1" (25 mm) nominal thickness
Weight: 6.7 lbs (3 kg)
Material: Proprietary Composite Material
STC Rating: 32, Flame Spread: 23
Smoke Density: 30 (ASTM E84/ NFPA 70)
Thermal Value: R 4.2
Temperature Range: -40° F to 350° F
(-40° C to 177° C)
Fire Rating: CLASS 1 Fire Rated ASTM E119 /NFPA
251 and UL 263 for 1 Hour Fire Rating

3801-531286: FBC1-FR

Ship Weight 7.8 lbs

Flexbox Fire Rated In-Wall Back Box


Dim: 14"W x 3.65"D x 16.5"H (368 x 89 x 406 mm)
Material Thickness: 1" (25 mm) nominal thickness
Weight: 5.4 lb (2.4 kg)
Material: Proprietary Composite Material
STC Rating: 32, Flame Spread: 23
Smoke Density: 30 (ASTM E84/ NFPA 70)
Thermal Value: R 4.2
Temperature Range: -40° F to 350° F
(-40° C to 177° C)
Fire Rating: CLASS 1 Fire Rated ASTM E119 /NFPA
251 and UL 263 for 1 Hour Fire Rating

3801-531262: FBW1-FR

Ship Weight 6.2 lbs

OutBack Rock speakers

OutBack Rock Speakers



Gray Granite

3120-524141: OB-R6G

Shipping Weight 12.5 lbs (5.7 kg)



White Sandstone

3120-524158 OB-R6W

Shipping Weight 12.5 lbs (5.7 kg)



Fieldstone

3120-524165: OB-R6F

Shipping Weight 12.5 lbs (5.7 kg)

OutBack Rocks

Russound's OutBack Rock Speakers, blend into any landscape, withstand the elements and were optimized for outdoor audio performance. The cast enclosure is made from a glass-reinforced resin to provide a sturdy, waterproof cabinet with low acoustic resonance for better sound. Impedance: 8 ohms. Efficiency: 89dB (1 watt @ 1 meter) Recommended power handling: 10-100 watts. 14" W x 10" H x 9.25" D (35.6 x 25.4 x 23.5 cm)



Two-channel Amplifier With Automatic Local Source Switching (35 Watts Per Channel)

Autosensing enables localized speaker override for a connected peripheral, such as a TV or PC. The Bridgeable power setting combines channel power for 100 watts into a single 8-ohm load, rated. 35 watts per channel RMS @ 8 Ohms. 8.625" W x 10"D x 2.375"H (22 x 25.4 x 6 cm)

2800-521874: R235LS

2800-522024: R235LS EU

2800-522222: R235LS UK

Shipping Weight 10 lbs (4.5 kg)



Two-Channel Dual Source Amplifier (90 watts per channel)

Two-channel, Dual source, 90-watt amplifier with auto-source switching. Features primary and secondary audio inputs, loop output, selectable speaker level input, and 12V trigger input and output. Rated at 90 watts per channel into 8 ohms, 110 watts into 4 ohms, and bridgeable to 250 watts of power into a single 8-ohm load.

2800-530463: R290DS

2800-530470: R290DS-EU

2800-530883: R290DS-UK

Shipping Weight 24.30 lbs (11.02 kg)



Four Zone/Eight-Channel Multiroom Amplifier (50 watts per channel)

Protection circuitry provides safety and reliability under heavy use. Amplifies up to four stereo line-level sources. Zones have dedicated line level inputs or can share a source via the bus input. Separate gain controls for each zone to preset room sound levels. Zone output can be switched to stereo or bridge mono output. In bridged mode, a zone's left and right channels are combined for a higher-power mono output, ideal for large rooms or outdoor listening areas. A+B speaker output in 4 ohm mode. Rack ears included. 50 watts per channel RMS @ 8 Ohms x 8 17" W x 16.5"D x 5.875"H (43 x 42 x 15 cm)

2800-521904: R850MC

2800-522048: R850MC EU

2800-522178: R850MC UK

Shipping Weight 51 lbs (23 kg)



Six Zone/Twelve-Channel Multiroom Amplifier (50 watts per channel)

Zones have dedicated line level inputs or can share a source via the bus input. Separate gain controls for each zone to preset room sound levels. Zone output can be switched to stereo or bridge mono output. In bridged mode, a zone's left and right channels are combined for a higher-power mono output, ideal for large rooms or outdoor listening areas. A+B speaker output in 4 ohm mode. Rack ears included. 50 watts per channel RMS @ 8 Ohms x 12. 17" W x 16.5"D x 5.875"H (43 x 42 x 15 m)

2800-521881: R1250MC

2800-522055: R1250MC EU

2800-522208: R1250MC UK

Shipping Weight 61.25 lbs (27.8 kg)

Volume Controls

ALTx Series 126 Watts

ALTx Master Packs



ALTx-2D

Volume control, with Decora® insert and knob. (cover plate included). detachable 12 gauge connector. (1x, 2x, 4x, 8x) impedance matching. 1.75" W x 2.5" H x 2.5" D (44.5 x 63.5 x 63.5 mm)

6100-526893: White, Almond & Bone
6100-114748: Black
6100-114250: Brown

Shipping Weight
 2 lbs (.9kg)



ALTx-2

Volume Control, with standard plate and knob detachable. 12 gauge connector. (1x, 2x, 4x, 8x) impedance matching. 1.75" W x 2.5" H x 2.5" D (44.5 x 63.5 x 63.5 mm)

6100-526886: White, Almond & Bone
6100-116377: Black
6100-113666: Brown

Shipping Weight
 2 lbs (.9kg)



ALTx-WIRi 2D

Volume Control with Built-in Infrared Receiver. Decora® insert and knob (cover plate included). 12 position switch. Accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.5" H x 2.9375" D (44.5 x 63.5 x 74 mm)

6100-117084: White
6100-117091: Almond
6100-117107: Bone
6100-117954: Black
6100-117961: Brown

Shipping Weight
 1 lbs (.5kg)



WALTx-2

Weatherproof Volume Control with Standard Plate and Knob. 12 position switch, 1x and 2x, 4x, 8x impedance matching. Fits a standard 3/4" PVC Outdoor conduit. Gray only. 3" W x 5" H x 3.75" D (76.5 x 127 x 95.5 mm)

6500-114113
 Shipping Weight
 1.75 lbs (.79 kg)



ALTx-MP-1

Contains (30) ALTx-2D volume controls.

6100-526923: White, Almond & Bone
6100-116476: Black
6100-116483: Brown

Shipping Weight
 37 lbs (16.7kg)



ALTx-MP-2

Contains (30) ALTx-2 volume controls

6100-526947: White, Almond & Bone
6100-116520: Black
6100-116537: Brown

Shipping Weight
 37 lbs (16.7kg)

LPTx Series 75 Watts

LPTx Master Packs



LPTx-2

Volume Control, with standard plate and knob accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.75" H x .625"D (44.5 x 70 x 66.7 mm)

6200-114991: White
6200-115141: Almond
6200-114090: Bone

Shipping Weight
 1.25 lbs (.57 kg)



LPTx-2D

Volume Control, with Decora® insert and knob (cover plate included). Accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.75" H x 2.625"D (44.5 x 70 x 66.7 mm)

6200-113512: White
6200-113536: Almond
6200-113529: Bone

Shipping Weight
 1.25 lbs (.57 kg)



LPTx-MP-1

Contains (30) LPTx-2D volume controls

6200-116551: White
6200-116544: Almond
6200-116568: Bone

Shipping Weight
 37 lbs (16.7kg)



LPTx-MP-2

(30) LPTx-2

6200-116582: White
6200-116575: Almond
6200-116599: Bone

Shipping Weight
 37 lbs (16.7kg)



Snap Connectors

(4) Snap connectors

9590-531774: SC4P

Shipping Weight
 1 lbs (.5kg)

Color Conversion Components



SP-6

(6) Plastic plates for ALTx & LPTx models.

9510-115110: White
9510-115080: Almond
9510-115097: Bone
9510-115073: Black
9510-115103: Brown
 Shipping Weight
 1 lbs (.5kg)



ACRP26

(6) Decora® cover plates. Fits ALTx, LPTx models.

7105-115479: White
7105-115493: Almond
7105-115486: Bone
7105-115509: Black
7105-115516: Brown
 Shipping Weight
 1 lbs (.5kg)



DP-6

(6) Decora® inserts. Fits ALTx, LPTx models.

9510-115165: White
9510-115127: Almond
9510-115660: Bone
9510-115134: Black
9510-115158: Brown
 Shipping Weight
 1 lbs (.5kg)



DP-WIR

IR Conversion kit with IR receiver and Decora®. For use with ALTx, LPTx and A70-1M models.

5100-115820: White
5100-115806: Almond
5100-115813: Bone
5100-118807: Black
5100-118791: Brown
 Shipping Weight
 1 lbs (.5kg)



VCK-6

(6) Plastic Volume Control Knobs. Fits ALTx, and LPTx models.

9510-115219: White
9510-115172: Almond
9510-115196: Bone
9510-115189: Black
9510-115202: Brown
 Shipping Weight
 1 lbs (.5kg)

Special Application Volume Control




Table Top Volume Control

126 Watt with headphone jack speaker override. Installer configurable from 1x, 2x, 4x or 8x impedance matching.
 6.0625" W x 2.5" H x 1.9375" D (154 x 63.5 x 49.3 mm)

6400-113161: TBL-75
 Shipping Weight 2.5 lbs (1.1kg)

Smart Select Systems



Modular Speaker Connecting Base Unit

4 speaker outputs and 1 amplifier input. Color-coded detachable 14-gauge snap connectors to support 4 zones.
 4.25" W x .75" H x 1.75" D
 (108 x 19.1 x 44.5 mm)

8100-120961: EZB-1SC
 Shipping Weight 6oz (.2kg)



Modular Speaker Block Add-on

Adds 4 Speaker Outputs to EZB-1SC to expand to 8 Zones.
 3.625" W x .75" H x 1.75" D
 (92.1 x 19.1 x 44.5 mm)

8100-120978: EZB-2SC
 Shipping Weight 6oz (.2kg)



Power Supply

110VAC/12V, 1000mA for the Smart Select Volume Control System. One unit required for each Separate Smart Select Volume Control System. Up to 12 controls. 2.1875" W x 2.875" H x 2.0625" D
 (55.7 x 73.1 x 52.4 mm)

6300-111075: 1201A
 Shipping Weight 1 lbs (.5kg)

Speaker Selectors

SS Series Single Source Selectors




4 pr. Speaker Selector, Single Source

100W/Ch. RMS, zone label. 4 Ω stable amplifiers & receivers. Resettable circuit protection. Impedance bypass switch for use with impedance matching volume controls. 8.5" W x 1.875" H x 6.25" D (22 x 4.8 x 16 cm)

3630-520679: SS-4.2

Shipping Weight
2.75 lbs (1.2kg)



6 pr. Speaker Selector, Single Source

70W/Ch. RMS, zone labels. 4 Ω stable amplifiers & receivers. Resettable circuit protection. Impedance bypass switch for use with impedance matching volume controls. 11.5" W x 1.875" H x 6.25" D (29.5 x 4.8 x 16 cm)

3630-520686: SS-6.2

Shipping Weight
3.5 lbs (1.6kg)



2 Pair Speaker Selector

100W/Ch. RMS. Color-coded detachable 14-gauge snap connector standard configuration is 4x - Installer may change configuration to 2x or 8x. Zone identifying labels included. 8.5" W x 3" H x 6.25" D (22 x 8 x 16 cm)

3615-604010: SDB-2.1

Shipping Weight
5.5 lbs (2.5 kg)



4 Pair Speaker Selector

200W/Ch. RMS. Color-coded detachable 14-gauge snap connectors. Standard configuration is 4x - Installer may change configuration to 2x or 8x. Zone identifying labels included. 17" W x 3" H x 6.25" D (43.5 x 8 x 16 cm)

3615-604027: SDB-4.1

Shipping Weight
9 lbs 4.1kg)



6 pair Speaker Selector

150 W/Ch. RMS. Color-coded detachable 14-gauge snap connectors. Standard configuration is 8x - Installer may change configuration to 2x or 4x. Zone identifying labels included. 17" W x 3" H x 6.25" D (43.5 x 8 x 16 cm)

3615-604034: SDB-6.1

Shipping Weight
11 lbs (5 kg)

Autoformer-Based Speaker Selectors



6 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603075: PRO-6 HP

Shipping Weight
9.5 lbs (4.3 kg)



8 pair Speaker Selector/Impedance Matching,

100W/Ch. RMS with subsonic filter, built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603136: PRO-8 HP

Shipping Weight 10 lbs (4.5kg)



12 pair Speaker Selector/Impedance Matching,

100W/Ch. RMS with subsonic filter built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603037: PRO-12 HP

Shipping Weight 10 lbs (4.5kg)

Miscellaneous Speaker Selectors



In-Wall, Dual-Source Selector

Allows a single pair of speakers to be driven by either of two amplifiers or allow a single amplifier to drive either of two pair of speakers. Decora® wallplate not included. 1" W x 2.75" H x 1.75" D (25.5 x 70 x 44.5 mm)

3699-520501: White AB-1.2

3699-520532: Almond AB-1.2

3699-520556: Bone AB-1.2

3699-521294: Brown AB-1.2

3699-521317: Black AB-1.2

Shipping Weight 3 oz (85 g)



Tabletop, Dual-Source Selector

Dual-source selector switch tabletop unit, allow a single pair of speakers to be driven by either of two amplifiers or allow a single amplifier to drive either of two pair of speakers. 5.5" W x 2.875" H x 3" D (140 x 73.5 x 76.5 mm)

3699-520525: AB-2.2

Shipping Weight 1.25 lbs (.57 kg)



Automatic Source Selector

Automatic A/B speaker selector, speaker level switching, selectable delay and sensitivity. Color-coded detachable 14-gauge snap connectors. Detachable 12VDC power supply 6.25" W x 2" H x 1.55" D (159 x 51 x 39 mm)

3699-520914: AB-3.2

3699-521270: AB-3.2 EU

3699-521287: AB-3.2 UK

Shipping Weight 1.7 lbs (.8kg)

FEINCE

ComPoint Basic Keypad Systems



ComPoint Basic 4 zone Kit

Includes 4 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), and power supply (ISPS). **Wall plate and speakers not included.**

2300-526787: ISB40
2300-527173: ISB40 EU
2300-527159: ISB40 UK
 Shipping Weight 5.7 lbs. (2.6 kg)

*EU/UK kits contain screwless wallplates




ComPoint Basic 4 zone kit w/Door Station

Includes 4 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-526381: ISB4
2300-527142: ISB4 EU
2300-527135: ISB4 UK
 Shipping Weight 6.5 lbs. (2.9 kg)

*EU/UK kits contain screwless wallplates




ComPoint Basic 6 zone kit

Includes 6 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), and power supply (ISPS). **Wall plate and speakers not included.**

2300-526794: ISB60
2300-527197: ISB60 EU
2300-527180: ISB60 UK
 Shipping Weight 6.7 lbs. (3 kg)

*EU/UK kits contain screwless wallplates



ComPoint Basic 6 zone kit w/ Door Station


Includes 6 basic keypads (ISK1) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-526398: ISB6
2300-527210: ISB6 EU
2300-527203: ISB6 UK
 Shipping Weight 7.6 lbs. (3.4 kg)

*EU/UK kits contain screwless wallplates



Compoint Advance Keypad Systems




ComPoint Adv. 4 zone kit

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), and power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-527029: ISA4
2300-527470: ISA4 EU
2300-527487: ISA4 UK
 Shipping Weight 6.5 lbs. (2.9 kg)

*EU/UK kits contain screwless wallplates




ComPoint Adv. 6 zone kit

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), and power supply (ISPS). **Wall plate and speakers not included.**

2300-526800: ISA60
2300-527234: ISA60 EU
2300-527227: ISA60 UK
 Shipping Weight 6.7 lbs. (3 kg)

*EU/UK kits contain screwless wallplates



ComPoint Adv. 6 zone kit w/ Door Station

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3). **Wall plate and speakers not included.**

2300-526404: ISA6
2300-527258: ISA6 EU
2300-527241: ISA6 UK
 Shipping Weight 7.6 lbs. (3.4 kg)

*EU/UK kits contain screwless wallplates



ComPoint Adv. 6 zone w/ 2 Door Stations

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and two antiqued brass finish door stations (ISK3). **Wall plate and speakers not included.**

2300-526411: ISA62
2300-527272: ISA62 EU
2300-527265: ISA62 UK
 Shipping Weight 8.5 lbs. (3.6 kg)

*EU/UK kits contain screwless wallplates



ComPoint® intercom system

ComPoint Intercom System



ComPoint Basic Keypad

Single-gang Decora® style keypad. Selects zones and door stations, controls receive volume, sets Do Not Disturb. Internal microphone with automatic gain control. Built-in amplifier powers one or two external speakers. 110 punch-down. Installer-selectable amber or green key backlighting. **Wall plate and speakers not included.** 1.875" W x 4" H x 2.25" D (4.8 x 10.2 x 5.7 cm)

2300-528286: White & Almond ISK1
2300-526299: Bone ISK1
2300-526312: Brown ISK1
2300-526329: Black ISK1
Shipping Weight 4.8 oz (136g)
FEHCE



ComPoint Advanced Keypad

Single-gang Decora® style keypad. Five-character LCD display, assignable zone names and indicates functions and volume level. Selects zones and door stations, controls receive volume, sets Do Not Disturb. Internal microphone with automatic gain control. Built-in amplifier powers one or two external speakers. Speaker relay allows the keypad to share speakers with an audio system for high-fidelity communications. 110 punch-down. Installer-selectable amber or green backlighting. (Required for systems with over 6 zones.) **Wall plate and speakers not included.** 1.875" W x 4" H x 2.625" D (4.8 x 10.2 x 6.7 cm)

2300-525384: White & Almond ISK2
2300-526336: Bone ISK2
2300-526350: Brown ISK2
2300-526367: Black ISK2
Shipping Weight 5.6 oz (159g)
FEHCE



ComPoint Door Station

Weatherproof call station fits a single-gang deep wall box. Plated die-cast zinc cover plate mounts flush to exterior wall. Internal microphone with automatic gain control. Built-in amplifier and speaker. 110 punch-down connector for CAT-5 cable. Internal relay with screw terminals for connecting to an external doorbell. Amber-backlighted Call key. 3" W x 5.125" H x 3" D (7.6 x 13.0 x 7.6 cm)

Maximum 2 Door Stations per system.

2300-525407: Antique Brass ISK3
2300-525414: Brushed Chrome ISK3
Shipping Weight 9 oz (.26 kg)
FEHCE



ComPoint Camera Door Station

Weatherproof call station fits a double-gang deep wall box. Plated die-cast zinc cover plate mounts flush to exterior wall. Black and white CCTV **NTSC ONLY** camera. Internal microphone with automatic gain control. Built-in amplifier and speaker. 110 punch-down connector for CAT-5 cable. Internal relay with screw terminals for connecting to an external doorbell. Amber-backlighted Call key. Maximum 2 Door Stations per system.

2300-528880: Antique Brass ISK4
2300-528897: Brushed Chrome ISK4
Shipping Weight 9 oz (.26 kg)
FEHCE



ComPoint Speaker

Single-gang Decora®-style in-wall speaker for use with the ComPoint intercom system. It installs beside a ComPoint keypad in a double-gang wall box. The ISSP allows ComPoint to be used as a stand-alone system. The high-quality driver in the ISSP is ideally matched to the keypad amplifier. Its moisture-resistant design makes it suitable for use in bathrooms and kitchens. Wall plate not included. 3" W x 5.125" H x 3" D (7.6 x 13.0 x 7.6 cm)

2300-528279: (White & Almond) ISSP

Shipping Weight 8 oz (227g)



Color Conversion Kit for ISSP

Includes (4) Grilles.

Shipping Weight 2oz (.1kg)

Wall plates and speakers not included.

2300-530494: White
2300-530500: Almond
2300-528446: Bone
2300-528453: Brown
2300-528460: Black
Shipping Weight 8 oz (227g)



ComPoint Hub

Six-zone surface- or panel-mount controller for the ComPoint system. Up to 6 hubs can link together for a total of 36 zones. Supports 2 door stations and provides 7 doorbell chimes, individually selectable for each door. Gain control for doorbell volume. RJ-45 connectors for keypads, door stations, and hub linking. Firmware updatable. Power supply not included. 6" W x 5" H x 2" D (15.2 x 12.7 x 5.1 cm)

2300-526459: ISH1

Shipping Weight 2 lbs. (.9 kg)



Advanced Programming Cable

Advanced programming cable for ComPoint components (ISK1, ISK2, ISK3, ISH1). Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065

Shipping Weight 1 lbs.(0.45 kg)



ComPoint Power Supply

15VDC 3.5A. Autosensing 100V-240VAC, detachable power cord, compact size. 4.56" W x 1.93" H x 1.33" D (115.8 x 49 x 33.8 mm)

2300-526282: ISPS

2300-526763: ISPS EU

2300-526770: ISPS UK

Shipping Weight 1lbs. (.5kg)



ComPoint Door Strike Release Module

Surface-mount module connects between the hub and a door station to provide relay contacts for a third-party door strike release or other device. 110 punch-down connector for CAT-5 cable. Screw terminals for access to common, NC and NO relay contacts. Relay rated for 1 A @ 12 VDC. 3" W x 1.875" H x 1" D (7.6 x 4.8 x 2.5 cm)

2300-525445: ISDR1

Shipping Weight 9 oz (.12 kg)



SaphIR Table Top Receivers



SaphIR Mini-Tabletop IR receiver

The receiver is CFL-friendly and has a front panel mounted blue talk back indicator. 84" cable with 1/8" stereo mini-plug. 12 VDC. 2.28" W x .72" H x 1.68" D (55 x 18 x 42 mm)

5100-121951: 854

Shipping Weight 3 oz (85 g)




SaphIR Mini-Tabletop Kit

Includes our 854 table top IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-521508: IRJ-1

Shipping Weight 1.5 lbs (.68 kg)



SaphIR Plasma-Friendly Table Top IR receiver,

Designed for Home Theater applications which use Plasma screens

5100-525933: 854P

Shipping Weight 3 oz (85 g)



SaphIR Plasma Friendly Mini-Tabletop Kit

Kit includes the 854P plasma-friendly tabletop IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526602: IRJ-1P

Shipping Weight 1.5 lbs (.68 kg)

SaphIR Eye Receivers



SaphIR Eye

862 Eye IR receiver is a flush-mounting design which mounts in a .5" hole. The 862 Eye is CFL-friendly and provides a blue talk back indicator visible from the front of the Eye. The 862 Eye is packaged with trim bezels in White, Black and Brass for installation flexibility. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-521362: 862

Shipping Weight 2 oz (57 g)



SaphIR Eye Kit

Kit includes our 862 Eye flush-mount IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-521515: IRJ-2

Shipping Weight 1.5 lbs (.68 kg)



SaphIR Plasma-Friendly Eye

Designed to work in Home Theater applications which use Plasma screens. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-521539: 862P

Shipping Weight 2 oz (57 g)



SaphIR Plasma Friendly Eye Kit

Kit includes the 862P Eye plasma-friendly flush-mount IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526619: IRJ-2P

Shipping Weight 1.5 lbs (.68 kg)

SaphIR Emitters



SaphIR Emitter

77" cable length.

5100-114076: 845.1

Shipping Weight 6oz (.2kg)



SaphIR Dual Head Emitter

77" cable length.

5100-113789: 1584.1

Shipping Weight 6oz (.2kg)



SaphIR LED Emitter

Stick-on emitter for controlling A/V equipment with highly sensitive IR receivers such as satellite receivers and cable boxes. 77" cable length. .5" x .375" x .25"D (12.7 x 9.6 x 6.4 mm)

5100-530340: 845.2

Shipping Weight 6oz (.2kg)



Dual Head LED Emitter

Stick-on emitter for controlling A/V equipment with highly sensitive IR receivers such as satellite receivers and cable boxes. 77" cable length. .5" x .375" x .25"D (12.7 x 9.6 x 6.4 mm)

5100-530357: 1584.2

Shipping Weight 6oz (.2kg)



SaphIR Phantom

IR receiver that mounts anywhere. The receiver is CFL-friendly and has a blue talk back indicator visible at the front of the Phantom. Its small size makes it easy to hide in plain view. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" W x 3/8" H x 2 1/8" D

5100-119620: White 860

5100-119637: Black 860

Shipping Weight 2 oz (57 g)



SaphIR Phantom Kit

Kit includes the 860 Phantom mini IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR

5100-526626: IRJ-4

Shipping Weight 1 lbs (.5kg)



SaphIR Plasma-Friendly Phantom

Designed to work in Home Theater applications which use Plasma screens. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-525957: Silver 860P

5100-525940: Black 860P

Shipping Weight 2 oz (57 g)



SaphIR Plasma-Friendly Phantom Kit

Kit includes the 860P Phantom plasma-friendly surface mount mini IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526633: IRJ-4P

Shipping Weight 1 lbs (.5kg)

SaphIR In-Wall Receivers



SaphIR In-Wall Receiver

mounts in a standard single-gang wall box. The receiver is CFL-friendly and provides a green LED indicator for Status and a blue LED indicator for talk back. 1.75" W x 4.3125" H x .375" D (44.5 x 63.5 x 63.5 mm)

Wall Plate not included.

5100-114458: White 858

5100-114465: Almond 858

5100-117923: Bone 858

5100-117930: Black 858

5100-117947: Brown 858

Shipping Weight 2 oz (57 g)



SaphIR In-Wall Receiver Kit

Kit includes our 858 in-wall IR receiver, 857 connection block, 846C power supply and (2) 1584.1 dual IR emitters.

Wall Plate not included.

5100-116308: White IRK-1

5100-116315: Almond IRK-1

Shipping Weight 1.5 lbs (.68 kg)



SaphIR Plasma-Friendly In-Wall IR receiver

Designed for Home Theater applications which use Plasma screens.

Wall Plate not included.

5100-521478: White 858P

5100-521423: Almond 858P

5100-521454: Bone 858P

5100-521430: Black 858P

5100-521461: Brown 858P

Shipping Weight 2 oz (57 g)



SaphIR Plasma-Friendly In-Wall Receiver kit

Includes our 858 in-wall IR receiver, 857 connection block, 846C power supply and (2) 1584.1 dual IR emitters.

Wall Plate not included.

5100-526640: White IRK-1P

5100-526695: Almond IRK-1P

Shipping Weight 1.5 lbs (.68 kg)

SaphIR Connecting Blocks



SaphIR Wall-Mounted Connecting Block

Front panel has 4 output jacks for IR emitters, an input jack for a system connection and an input jack for IR system power. A terminal block at the rear of the IRB-6 accepts connections from remotely located IR receivers. Single-gang box or p-ring. Uses standard Decora cover plates. (Available in white only) 1.4375" W x 2.625" H x 1.625" D (36.6 x 66.7 x 41.3 mm)

Wall Plate not included.

5100-113338: IRB-6

Shipping Weight 6 oz (.2kg)



SaphIR Connecting Block

IR Receiver, 6 emitters, a 12 volt power supply and a 12V Status power supply. LED's indicate power status and IR activity. 3.25" W x 1.85" H x 1" D (83 x 47 x 25 mm)

5100-115455: 857

Shipping Weight 4 oz (113 g)

SaphIR Connecting Block Kit

Includes our 857 connecting block and 846C power supply. Select the other components you need to complete your installation from our comprehensive SaphIR product line.

5100-521522: IRJ-3

Shipping Weight 1 lbs (.5kg)

SaphIR Power Supplies



12 Volt, 300mA Power Supply

6 foot cord terminating in 2.1mm coaxial plug. 110VAC
2" W x 2.375" H x 1.625" D
(50.8 x 60.4 x 41.3 mm)

5100-480034 846C

Shipping Weight 6 oz (.2 kg)



12 Volt, 1000mA Power Supply

May be used to drive up to 4 SaphIR K2 Keypads. 6 foot cord terminating in 2.1mm coaxial plug. 110VAC
2.1875" W x 2.875" H x 2.0625" D (55.7 x 73.1 x 52.4 mm)

6300-111075 1201A

Shipping Weight 10 oz (.28 kg)

SaphIR Connecting Blocks



SaphIR Connection Terminal

IRB-1 is an effective way to connect an IR receiver to an IR control system. It provides a single jack in the front panel for the IR receiver connection and screw terminals at the rear for the in-wall IR wiring. Mounts in a single gang junction box or p-ring and uses standard Decora cover plates. (Available in white only) 1.4375" W x 2.625" H x 1.625" D (36.6 x 66.7 x 41.3 mm)
Wall plate and speakers not included.

5100-113321 IRB-1

Shipping Weight 6 oz (.2kg)



Receiver Extension

50 foot cable with stereo male/female 3.5mm mini connectors for extending receivers. 1.4375" W x 2.625" H (36.6 x 66.7 mm)

5200-480065: 900

Shipping Weight 4 oz (113 g)



SaphIR In-Wall IR receiver

Add-on for ALTx and LPTx volume controls and adds the capability to receive IR commands to an existing speaker volume control wall plate. The receiver is CFL-friendly and provides an LED indicator for system status.

5100-115820: White DP-WIR

5100-115806: Almond DP-WIR

5100-115813: Bone DP-WIR

5100-118807: Black DP-WIR

5100-118791: Brown DP-WIR

Shipping Weight 2 oz (57 g)



4 conductor, 22 gauge cable

2 pair twisted w/shield, 19/34 tinned copper, PVC jacket, temp. Rating 75° C, UL Type CL3, White jacket. 1000 foot pull-box only. Conducts sensitive IR signals and shields them from outside noise.

9000-115240: AW2260AB

CALL FOR PRICING

39

Miscellaneous



Universal Learning/Programmable IR In-Wall Keypad

Source component library of over 1,000 devices, built-in IR receiver with talk back LED, display backlight switchable to green or amber. Controls up to 8 A/V components. Requires 1201A power supply.

Requires programing cable.

2500-121036

2500-528248: White/Almond K2

Shipping Weight 1.25 lbs (.57 kg)

REMOTE



UNO-S2/K2 Conversion kit

(1) Mounting plate,
(1) Insert Plate,
(1) Cover plate.

2500-528156: White

2500-528163: Almond

2500-528118: Bone

2500-528125: Black

2500-528132: Brown

Shipping Weight 2 oz (.1kg)



Remote Control

Complete solution for all of your remote control requirements. It is designed to operate source devices and Russound audio system keypads. Controls up to eight devices.

1210-524196: SRC2

Shipping Weight 5 oz. (.11 kg)



Download your FREE EZpro software from www.russound.com

SaphIR EZpro

Custom programming software allows the installer to quickly and easily setup many complex parameters for the SaphIR K2 keypad. Save and use programming for new jobs and to quickly recall and edit previous installations — saving time and money. Logical menus and a familiar interface make it user friendly. **Requires programming cable. 2500-121036**



Brushed Aluminum Cover plate

2500-530531

Shipping Weight 2oz (.071kg)

PlateMate Home theater



Home Theater Plate

For 5.1, 6.1 or 7.1 surround sound (14) 5-way binding posts (2) RCA-F connectors on heavy-duty molded plate. (2) powered subwoofers.

7101-524110: HTP-2

Shipping Weight 8 oz. (.23 kg)



Home Theater Plate

(12) 5-way binding posts, 7/16" hex head, (2) RCA-F connectors on double-gang standard plate. Hookup for passive or powered subwoofer.

7101-121807 : HTP-1

Shipping Weight 7 oz. (.2 kg)

PlateMate Spring Loaded Connectors



SL-2P

Crimp-on rear terminal on a standard pate.

7101-803017: White



SL-4P

Crimp-on rear terminal on a standard plate.

7101-803079: White

PlateMate 5-way Binding Post Connectors



BP1D

(2) PM-BP (1 Red and 1 Black)
(1) ACRP-26 Decora plate.

7101-850240



BP10D

(4) PM-BP (2 Red and 2 Black)
(1) ACRP-26 Decora plate.

7101-850486

PlateMate-6 packs



PM-MOD1S

Single gang plate with (1) modular hole. 6 pcs. Per box.

7104-112027: White

7104-112256: Bone

7104-120251: Almond



PM-MOD2S

Single gang plate with (2) modular holes. 6 pcs. Per box.

7104-112034: White

7104-112263: Bone

7104-120275: Almond



PM-MOD3S

Single gang plate with (3) modular hole. 6 pcs. Per box.

7104-112041: White

7104-112270: Bone

7104-120299: Almond



PM-MOD4S

Single gang plate with (4) modular holes. 6 pcs. Per box.

7104-113345: White

7104-113352: Bone

7104-120305: Almond



PM-MOD1D

Decora insert with (1) modular holes. 6 pcs per box.

7104-112058: White

7104-112287: Bone

7104-120244: Almond



PM-MOD2D

Decora insert with (2) modular holes. 6 pcs. Per box.

7104-112065: White

7104-112294: Bone

7104-120268: Almond



PM-MOD3D

Decora insert with (2) hex and (1) modular holes. 6 Pcs Per Box

7104-112072: White

7104-112300: Bone

7104-120282: Almond



PM-MOD4D

Decora insert with (4) modular holes. 6 pcs. Per box.

7104-520471: White

7104-520488: Bone

7104-520495: Almond

PlateMate Modular Plates 6-packs


PM-1S

1 hex hole. 6 pcs. Per box.
7104-111907 White
7104-112133 Bone


PM-2S

2 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111914 White
7104-112140 Bone


PM-3S

3 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111921 White
7104-112157 Bone


PM-4S

4 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111938 White
7104-112164 Bone


PM-6S*

6 hex holes. 6 pcs. Per box.
Not used with PM-DB.
7104-111945 White
7104-112171 Bone


PM-8S*

Standard single gang plate with 8 hex holes. 6 pcs. Per box. **Not used with PM-DB.**
7104-111952 White
7104-112188 Bone


PM-1D

Decora insert with 1 hex hole. 6 pcs. Per box.
7104-111969 White
7104-112331 Almond
7104-112195 Bone


PM-2D

Decora insert with 2 hex hole. 6 pcs. Per box. **Not used with PM-DB**
7104-111976 White
7104-112348 Almond
7104-112201 Bone


PM-3D

Decora insert with 3 hex hole. 6 pcs. Per box. **Not used with PM-DB**
7104-111983 White
7104-112355 Almond
7104-112218 Bone


PM-4D

Decora insert with 4 hex hole. 6 pcs. Per box. **Not used with PM-DB**
7104-111990 White
7104-112362 Almond
7104-112225 Bone


PM-6D*

Decora insert with 6 hex holes. 6 pcs. Box. **Not used with PM-DB.**
7104-112003 White
7104-112379 Almond
7104-112232 Bone


PM-8D*

Decora insert with 8 hex holes. 6 pcs. Per box. **Not used with PM-DB.**
7104-112010 White
7104-112386 Almond
7104-112249 Bone

PlateMate Decora Wall Plates


ACRP-26

Pack of 25.
7105-451003 White
7105-451041 Almond
7105-451010 Bone
7105-451027 Black
7105-451058 Brown
Shipping 1 lbs 4oz (.58kg)


ACRP-262

Pack of 25
7105-451065 White
7105-113802 Almond
7105-451072 Bone
7105-451089 Black
7105-114700 Brown
Shipping Weight 2 oz (.05 kg)


ACRP-263

Sold Individually.
7105-451126 White
7105-115691 Almond
7105-451133 Bone
7105-119514 Black
7105-115622 Brown
Shipping Weight 2 oz (.05 kg)

PlateMate Decora Wall Plates


ACRP-264

Sold Individually.
7105-451188 White
7105-119521 Almond
7105-451195 Bone
7105-451201 Black
7105-119538 Brown
Shipping Weight 2 oz (.05 kg)


ACRP-265

Sold Individually.
7105-451249 White
7105-451287 Almond
7105-451256 Bone
7105-119545 Black
7105-119552 Brown
Shipping Weight 3 oz (.09 kg)


ACRP-266

Sold Individually
7105-451300 White
7105-119569 Almond
7105-451317 Bone
7105-115707 Black
7105-114717 Brown
Shipping Weight 3 oz (.09 kg)

Decora Screwless Cover Plates



SWP-1

7106-115615 White
7106-114267 Almond
7106-526992 Black

Shipping Weight 2oz (.071kg)

MSRP
\$ 7.50

Dealer
\$4.95



SWP-2

7106-114274 White
7106-114281 Almond
7106-531040 Black

Shipping Weight 2oz (.071kg)



SWP-S21

Two gang + single gang
7106-526831 White
7106-528439 Almond
7106-528477 Bone
7106-528491 Black
7106-528484 Brown

Shipping Weight 2oz (.071kg)



SWP-3

7106-115301 White
7106-115431 Almond

Shipping Weight 3oz (.10kg)



SWP-4

7106-115677 White
7106-115448 Almond

Shipping Weight 3.5oz (.11kg)



Stainless Steel

7106-526480: SWP-1.SS
 Shipping Weight 2oz (.071kg)



Stainless Steel

7106-526497: SWP-2.SS
 Shipping Weight 2oz (.071kg)



Brushed Aluminum

2500-530531: Br. Aluminum
 Shipping Weight 2oz (.071kg)



Stainless Steel

7106-526503: SWP-3.SS
 Shipping Weight 3.5oz (.11kg)



Stainless Steel

7106-526510: SWP-4.SS
 Shipping Weight 3.5oz (.11kg)

Plastic Work Boxes—New Construction



Single Gang, 18 inches³ Work box

Captive mounting nails. Two Quick Click® entries for each end. 2.0625" W x 2.875" H x 3.125" D (52.4 x 73.1 x 79.4 mm). 4oz (.1kg)
7200-450075: S1-18-R

Single Gang, 22 inches³ Work box

Single gang captive mounting nails. Two Quick Click® entries for each end. 2.0625" W x 2.9375" H x 3.4375" D (52.4 x 74.7 x 87.4 mm).
7200-114694: S1-22-R
 Shipping weight 5oz (.1kg)

Double Gang Work box

Double gang captive mounting nails. Four Quick Click® entries for each end. 3.8125" W x 2.9375" H x 3.0625" D (96.9 x 74.7 x 77.8 mm).
7200-450082: S2-35-RAC
 Shipping Weight 5oz (.1kg)

Triple Gang Work box

Triple gang captive mounting nails. Six Auto Clamps® for each end. 5.875" W x 2.9375" H x 3.125" D (149.3 x 74.7 x 79.4 mm).
7200-450099: S3-54-RAC
 Shipping weight 7oz (.2kg)

UL Classified and ICBO Recognized. Quick Click® and Auto Clamp are registered trademarks of the Pass and Seymour/Legrand Corporation. Note: All Work Boxes must be purchased in 10 piece lots.

Plastic Work Boxes – Retrofit




S1-18-W

Single gang with two Auto Clamps®. Two Quick Click® entries for each end. 2.0625" W x 2.875" H x 3.125" D (52.4 x 73.1 x 79.4 cm)
7200-450051: S1-18-W
 Shipping Weight 4oz (.1kg)

S2-32-W

Double gang with four Auto Clamps®. Four Quick Click® entries for each end. 3.875" W x 2.9375" H x 3.125" D (98.5 x 74.7 x 79.4 cm)
7200-450068: S2-32-W
 Shipping Weight 5oz (.1kg)

P-Rings – Retrofit



1 gang p-ring

2.5" W x 4.25" H x 1.5" D (63.5 x 108 x 38.1 mm)
7200-119576: CADMP1P
 Shipping Weight 1oz (.05kg)

2 gang p-ring

4.25" W x 4.25" H x 1.5" D (108 x 108 x 38.1 mm)
7200-119583: CADMPAL2
 Shipping Weight 1oz (.05kg)

3/4 (cut-away partitions) gang p-ring

7.875" W x 4.25" H x 1.5" D (201 x 108 x 38.1 mm)
7200-119590: CADMP34P
 Shipping Weight 1oz (.05kg)



MOD-VB

Premium gold plated RCA. Converts video signal from RCA to CAT-5 cable. works upto 2200' Sold in pairs.

7103-121876

Shipping Weight 2 oz (.05 kg)



MOD-F2F

Premium gold plated female F to F connectors with modular bracket. 12 Pcs. Per box. For use with PM-MOD wall plates.

7103-111358: White

7103-111587: Bone

7103-120336: Almond

Shipping Weight 5 oz (.1 kg)



MOD-RJ45CAT5

RJ-45 modular telephone Jack with CAT-5 Connector. Gold plated. 6 Pcs. Per Box. For Use With PM-MOD wallplates

7103-111365: White

7103-111594: Bone

7103-120312: Almond

Shipping Weight 2 oz (.05 kg)



MOD-RJ11

RJ11 Telephone Jack (6 Wire) gold plated. 6 Pcs. Per box for use with PM-MOD wall plates.

7103-111372: White

7103-111600: Bone

7103-120329: Almond

Shipping Weight 2 oz (.05 kg)



PM-BP

Premium heavy duty gold plate 5-way binding posts. 12 Pair Per Box. (12 Red and 12 Black)

7103-111822

Shipping Weight 9 oz (.25 kg)



PM-BJ

Premium gold plated Banana Jacks. 12 Pair Per Box. (12 Red and 12 Black)

7103-111839

Shipping Weight 9 oz (.25 kg)



PM-SB

Premium gold plated banana plugs with threaded insert. 6 Pair per box. (6 Red and 6 Black)

7103-115523

Shipping Weight 4.5 oz (.1 kg)



PM-DB

Premium gold plated double banana plugs with threaded insert. 6 Pcs. Per Box.

7103-112423

Shipping Weight 6 oz (.17 kg)



PM-RCA

Premium gold plated RCA jack-rear solder tab. 12 Pcs. Per box.

7103-112317: Yellow

7103-112089: White

7103-111846: Red

Shipping Weight 3.5 oz (.1 kg)



PM-RCA2

Premium gold plated RCA Jack to RCA jack. 12 Pcs. Per Box

7103-112416: Yellow

7103-112409: White

7103-112393: Red

Shipping Weight 3.5 oz (.1 kg)



PM-RCAF

Premium Gold Plated RCA Jack to F-connectors. 12 Pcs. Per Box

7103-112324: Yellow

7103-112096: White

7103-111853: Red

7103-521355: Green

7103-521348: Blue

Shipping Weight 3 oz (.09 kg)



PM-FF

Premium Gold Plated Female F to F connectors. 12 Pcs. Per Box.

7103-111860

Shipping Weight 3.5 oz (.1 kg)




UK Single Gang Metal Workbox

47 mm deep metal UK style back box for use with A-KP-EU
7200-521492




Grey Single Gang, Surface Mount Workbox

Allows single gang devices to be mounted on wall.
 53mm deep. **Call for special order in White finish.**
7200-526701



Double Gang Arlington Ring

Low voltage double gang ring style
 mounting P-ring.
7200-521493



Grey Double Gang, Surface Mount Workbox

Allows double gang devices to be mounted on wall.
 53mm deep. **Call for special order in White finish.**
7200-521133

Outdoor Thermoplastic Covers



Vertical, Single Gang Thermoplastic Cover

Self-closing cover with 3/8" gasket and 2 mounting screws.
Mounts to single-gang box not included.
 3.0625" W x 4.8125" H x 1.1875" D (77.8 x 122.4 x 30.2 mm)
9000-450020: WPB 37-23
 Shipping Weight 9oz (.3kg)

Vertical, Single Gang Thermoplastic Cover

Same as above except mounts to flat surface with 4 screws.
 3.0625" W x 4.8125" H x 1.1875" D (77.8 x 122.3 x 30.2 mm)
9000-450037: WPB 37-23FS
 Shipping Weight 9oz (.3kg)

Horizontal, Single Gang Thermoplastic Cover

Horizontal self-closing cover with 3/32" gasket and 2 mounting screws. Mounts to single-gang box.
 4.9375" W x 2.875" H x 1.6875" D (125.5 x 73.1 x 42.9 mm)
9000-450006: WPB 37-03
 Shipping Weight 9oz (.3kg)

Horizontal, Single Gang Thermoplastic Cover

Same as above except mounts to flat surface with 4 screws.
 4.9375" W x 2.875" H x 1.75" D (125.5 x 73.1 x 44.5 mm)
9000-450013: WPB 37-03FS
 Shipping Weight 9oz (.3kg)



Clear, Double Gang Thermoplastic Cover

7200-521157: E9U2CRN
 Surface mount grey weather proof outdoor cover. Allows
 double gang device to be mounted outside.
Workbox not included.



Grey, Double Gang Thermoplastic Cover

7200-521164: E9U2GRN
 Double gang, surface mount grey weather proof outdoor
 cover. Allows double gang device to be mounted outside.
Workbox not included.

System Accessories

**AC 12-Volt Trigger**

120 VAC - 12-Volt DC triggered outlet with resettable circuit breaker. Switches up to 10 amps. 3.75" W x 2" H x 5" D (9.5 x 5.1 x 12.7 cm)

Not for sale in countries with RoHS requirements

9500-115592: ACT-1 US

9500-114298: ACT-1 UK


Shipping Weight 1 lbs. (.45 kg)

**Speaker to line-level adapter**

Recommended for use with CAA66 and CAM6.6 to obtain line level outputs for zones without pre-amp outputs. Color-coded detachable 14-gauge snap connectors. 3.375" W x 1" H x 2.5" D (8.6 x 2.6 x 6.4 cm)

9500-200891: ADP-1.2

Shipping Weight 14 oz (.4 kg)

**110 Patch Plug**

Two pieces, sold in quantities of 10 per pack.

8200-526756: S110P4

**Speaker relay module**

Share speakers between controllers and home theater. Add 12-VDC automatic A/B switching, speaker level, between CA amplifier and local amplifier. 1.3125" W x 2.5" H x 1.875" D (33.5 x 63.5 x 48 mm) **Wall plates not included with keypads.**

1200-115585: White SRM-2.1

1200-114021: Almond SRM-2.1

Shipping Weight 4 oz (.11 kg)

**Snap Connectors**

(4) Snap connectors

9590-531774: SC4P

Shipping Weight

1 lbs (.5kg)

PG 1111

Data and Speaker Cable

**2Conductor, 16 gauge Speaker Cable**

Unshielded, 26/30 strands bare copper, .024 nominal PVC jacket, temp. rating 75° C, UL type CL3, Light Blue Jacket. 1000 foot pull-box only.

9000-119316: AW162CL3

Call For Pricing

**4 Pair Twisted, 24 Gauge, CAT-5E Cable**

Solid copper, PVC jacket, telephone/data grade/ISDN. Zipcord with 4 conductor, 16 gauge speaker cable. 500 foot spool. PINK jacket.

9000-121838: AW164C5

Call For Pricing

**4 Conductor, 22 Gauge Signal/Data Cable**

2 pair twisted w/shield, 19/34 tinned copper, PVC jacket, temp. Rating 75° C, UL Type CL3, White jacket. 1000 foot pull-box only. Conducts sensitive IR signals and shields them from outside noise.

9000-115240: AW2260AB

Call For Pricing

**8 Conductor, 24 Gauge CAT-5E Cable**

4 pair twisted, solid copper, PVC jacket, telephone/data grade/ISDN, GRAY jacket. 1000 Foot pull-box only.

9000-119323: AWCAT5

Call For Pricing

**4 Conductor, 16 Gauge Speaker Cable**

Unshielded, 26/30 strands bare copper, .024 nominal PVC jacket, temp. rating 75° C, UL Type CL3, Yellow Jacket. 500 foot pull-box only.

9000-460067: AW164CL3

Call For Pricing



PRODUCT CATEGORY WARRANTY

ONE YEAR LIMITED WARRANTY:

SMS3 SMART MEDIA SERVER

TWO YEAR LIMITED WARRANTY:

IBRIDGE DOCK, IBRIDGE POWER DOCK, IBRIDGE BAY
 SMART TUNERS (ST2, ST2S, ST2-XM, ST2-XM2)
 COLLAGE (CAK1, CMM1)
 C-SERIES (MCA-C5, MDK-C5)
 CAV/CAM (CAV6.6, CAM6.6, UNO-S2, UNO-S1, UNO-TS2, UNO-TS2D)
 CAA/CAS (CAS44, CAA66, KP4, KP6, KPL, KPSC, SRM-2.1, ADP-1)
 CA4 (CA4, CA4-WP, CA4-KP)
 A-BUS (A-KP2, A-H1, A-H4, A-H4P, A-H4D, A-H2, A-H484, A-PS, A-LC2, A-LRC1, A-VC2, A-H4DX, A-OM)
 COMPOINT (ISK1, ISK2, ISK3, ISSP, ISH1, ISDR1, ISPS)
 R-SERIES AMPLIFIERS (R235LS, R290DS, R850MC, R1250MC)
 VIDEO DISTRIBUTION (CRX, CTX, HDRX, HDTX, VM1, WMR1, HDMIX)
 SAPHIR PRODUCTS
 ACCESSORIES (ACT-1, EZB, ADP-1.2, EXB-1SC, EXB-2SC, SA-ZX3, SRC1, SCR2, SRM-2.1)

FIVE YEAR LIMITED WARRANTY:

RATIO, OUTBACK, AND OUTBACK ROCK SPEAKERS

TEN YEAR LIMITED WARRANTY:

SPEAKER SELECTORS AND IMPEDANCE MATCHING DEVICES (SS, PRO, SDB, AB)

LIMITED LIFETIME WARRANTY :

VOLUME CONTROLS (ALTX, LPTX, WALT2, TBL)
 ACCLAIM 5 AND 7 SERIES SPEAKERS
 FLEXBOX SPEAKER BACK BOXES

RETURNS AND WARRANTY POLICY

Russound sells products only through authorized Dealers and Distributors to ensure that customers obtain proper support and service. Any Russound product purchased from an unauthorized dealer or other source, including retailers, mail order sellers and online sellers will not be honored or serviced under existing Russound warranty policy. Any sale of products by an unauthorized source or other manner not authorized by Russound shall void the warranty on the applicable product.

Returns must be authorized and be accompanied with an R.A. number and a copy of the proof of purchase.

A 15% restocking charge may apply. Any returns for repair found to be non-defective may result in a fifty dollar minimum charge. Any product returned without a Return Authorization Number will be returned at dealer expense.

For further warranty information, see Russound product manuals.

Prices and specifications subject to change without notice. Russound is not responsible for typographical errors. E. & O. E. Decora® is a registered trademark of Leviton Corporation.

A-BUS® is a registered trademark of LeisureTech Pty Ltd Australia. iPod is a trademark of Apple, Inc., registered in the U.S. and other countries.

Russound
 5 Forbes Road, Newmarket, NH 03857, USA
 www.russound.com | Tel 603.659.5170 | Fax 603.659.5388
 Contact: sales@russound.com
 03.02.09
 Dealer Catalog Literature Number – LR9910-0007

The Russound Pledge

Speak to a real person

We believe in personal attention and have real people to answer your calls during business hours. And Russounders don't hide behind voice mail.

Answers and solutions

We promise to do our utmost to satisfy your needs on the first contact or with a return response that very day. We make it our priority to answer your question and resolve issues in a prompt and courteous manner.

Inventory

We offer a complete product line and maintain a deep inventory of items. In fact, 97% of all orders are shipped complete.

Same day shipping

Orders placed by 2:00 PM EST will be shipped that day.

The shipping status with tracking number will be confirmed to you via e-mail that same day.

(International shipments do not apply)

Knowledge

Knowledgeable Sales personnel that are fast, fun and friendly to work with. Tech Support The best tech support in the business, from 8:30 am to 7:00 PM (EST), Monday through Friday.

Education

Dedicated professional regional trainers and comprehensive educational programs.

E-friendly

E-mail us or visit our website up-to-date sales and technical information 24/7 at www.Russound.com.

Product Integrity

Russound backs all of its products with quality and a no nonsense warranty. We'll do whatever it takes to make a situation right. For extra peace of mind, Russound obtains all applicable safety approvals for our products, even when they're not required.

Courtesy

We treat everyone with courtesy, dignity and respect. And that means everyone.

Our primary goal is to establish a long-lasting, mutually beneficial relationship.

